SENTINEL HOLDING
INSTITUT

SHI-PRODUKTPASS

Produkte finden - Gebäude zertifizieren

GEPRÜFT NACHHALTIGES PRODUKT
SHI PRODUKT PASS
SENTINEL HOLDING INSTITUT
www.sentinel-holding.eu/pruefkriterien

SHI-Produktpass-Nr.:

14296-10-1001

Barlinek Naturholzböden - Wood Floors

Warengruppe: Bodenbeläge / Wandbeläge / Deckensysteme - Parkett

Barlinek
WOODEN FLOORS

BARLINEK S.A
Al. Solidarności 36
25-323 Kielce

Produktqualitäten:

- SHI-Produkt bewertung ✓
- QNG Qualitätssiegel Nachhaltiges Gebäude ✓
- DGNB NEUBAU 2023.2 ✓
- DGNB NEUBAU 2023 ✓
- DGNB NEUBAU 2018 ✓
- BNB-BN NEUBAU V2015 ✓
- EU-TAXONOMIE ✓
- BREEAM DE NEUBAU 2018 ✓
- LEED v4.1 (outside US) ✓

EVIDANA

Köttner

Helmut Köttner
Wissenschaftlicher Leiter
EVIDANA GmbH
Freiburg, den 14.10.2026

Inhalt

SHI-Produktbewertung	1
QNG - Qualitätssiegel Nachhaltiges Gebäude	2
DGNB Neubau 2023.2	3
DGNB Neubau 2023	4
DGNB Neubau 2018	6
BNB-BN Neubau V2015	7
EU-Taxonomie	8
BREEAM DE Neubau 2018	9
LEED v4.1	10
Produktsiegel	11
Rechtliche Hinweise	12
Technisches Datenblatt/Anhänge	12

Die in der SHI-Datenbank hinterlegten Bauproduktinformationen und Nachweise werden durch das SHI kontinuierlich geprüft und aktualisiert.

Die Prozesse werden regelmäßig durch das unabhängige Prüfunternehmen SGS TÜV Saar überprüft.

Unabhängige Prüfung durch EVIDANA
Die EVIDANA GmbH ist die unabhängige Prüfstelle für die im SHI-Produktpass ausgewiesenen Produktbewertungen. Sie prüft die vorliegenden Herstellerunterlagen und Nachweise anhand der jeweils festgelegten Kriterien und berücksichtigt – sofern erforderlich – ergänzende Laborprüfungen. Auf Grundlage des Prüfergebnisses entscheidet das Sentinel Holding Institut über die Vergabe der entsprechenden SHI-Siegel und die Darstellung der Bewertung im SHI-Produktpass.

SENTINEL HOLDING
INSTITUT

Produkt:
Barlinek Naturholzböden - Wood Floors

SHI Produktpass-Nr.:
14296-10-1001

Barlinek
WOODEN FLOORS

SHI-Produktbewertung

Seit 2008 entwickelt die Sentinel Holding Institut GmbH (SHI) Kriterien für schadstoffgeprüfte Produkte. Die Einhaltung der festgelegten und transparent veröffentlichten Kriterien wird durch die unabhängige Prüfstelle EVIDANA GmbH anhand der erforderlichen Produktunterlagen, Nachweise und gegebenenfalls Laborprüfungen bewertet. Auf Grundlage des Prüfergebnisses entscheidet SHI über die Vergabe des Siegels „SHI Schadstoffgeprüft".

Kriterium	Produktkategorie	Schadstoffgrenzwert	Bewertung
SHI-Produktbewertung	Bodenbeläge aus Holz /-werkstoff	TVOC ≤ 300 µg/m^3 Formaldehyd ≤ 36 µg/m^3	Schadstoffgeprüft
Gültig bis: 23.04.2028			

SENTINEL HOLDING
INSTITUT

Produkt:
Barlinek Naturholzböden - Wood Floors

SHI Produktpass-Nr.:
14296-10-1001

Barlinek
WOODEN FLOORS

QNG - Qualitätssiegel Nachhaltiges Gebäude

Das Qualitätssiegel Nachhaltiges Gebäude, entwickelt durch das Bundesministerium für Wohnen, Stadtentwicklung und Bauwesen (BMWSB), legt Anforderungen an die ökologische, soziokulturelle und ökonomische Qualität von Gebäuden fest. Das Sentinel Holding Institut prüft Bauprodukte gemäß den QNG-Anforderungen für eine Zertifizierung und vergibt das QNG-ready Siegel. Das Einhalten des QNG-Standards ist Voraussetzung für den KfW-Förderkredit. Für bestimmte Produktgruppen hat das QNG derzeit keine spezifischen Anforderungen definiert. Diese Produkte sind als nicht bewertungsrelevant eingestuft, können jedoch in QNG-Projekten genutzt werden. Die unabhängige Prüfstelle EVIDANA GmbH bewertet anhand der vorliegenden Nachweise, ob die für das jeweilige Produkt betrachteten produktbezogenen Anforderungen erfüllt sind.

Kriterium	Pos. / Bauproduktgruppe	Betrachtete Stoffe	QNG Freigabe
3.1.3 Schadstoffvermeidung in Baumaterialien	2.3 Mehrschichtiges Holzparkett, Bambusbeläge und Bodenbeläge auf Holzwerkstoff-Trägerplatten	VOC / Emissionen / gefährliche Stoffe	QNG-ready
Nachweis: Prüfbericht des Instituts Eurofins Product Testing A/S vom 27.04.2023. Konformitätserklärung vom 23.02.2026 bestätigt die materielle Übereinstimmung mit dem geprüften Produkt.			

Kriterium	Bewertung
ANF2-WG1 Nachhaltige Materialgewinnung	Kann Gesamtbewertung positiv beeinflussen
Nachweis: FSC SGSCH-COC-001258 vom 27.December 2022	

SENTINEL HOLDING
INSTITUT

Produkt:
Barlinek Naturholzböden - Wood Floors

SHI Produktpass-Nr.:
14296-10-1001

Barlinek
WOODEN FLOORS

DGNB Neubau 2023.2

Das DGNB-System (Deutsche Gesellschaft für Nachhaltiges Bauen) bewertet die Nachhaltigkeit von Gebäuden verschiedener Art. Das System ist sowohl anwendbar für private und gewerbliche Großprojekte als auch für kleinere Wohngebäude. Die Version 2023.2 setzt hohe Standards für ökologische, ökonomische, soziokulturelle und funktionale Aspekte während des gesamten Lebenszyklus eines Gebäudes. Die unabhängige Prüfstelle EVIDANA GmbH bewertet anhand der vorliegenden Nachweise, ob die für das jeweilige Produkt betrachteten produktbezogenen Anforderungen erfüllt sind.

Kriterium	Pos. / Relevante Bauteile / Bau-Materialien / Flächen	Betrachtete Stoffe / Aspekte	Qualitätsstufe
ENV 1.2 Risiken für die lokale Umwelt	47c Parkette, Laminatböden, MMF- und WPC-Bödenbeläge (innen)	VVOC, VOC, SVOC Emissionen und Gehalt an gefährlichen Stoffen	Qualitätsstufe: 4
Nachweis: Prüfbericht des Instituts Eurofins Product Testing A/S vom 27.04.2023. Konformitätserklärung vom 23.02.2026 bestätigt die materielle Übereinstimmung mit dem geprüften Produkt.			

SENTINEL HOLDING
INSTITUT

Produkt:
Barlinek Naturholzböden - Wood Floors

SHI Produktpass-Nr.:
14296-10-1001

Barlinek
WOODEN FLOORS

DGNB Neubau 2023

Das DGNB-System (Deutsche Gesellschaft für Nachhaltiges Bauen) bewertet die Nachhaltigkeit von Gebäuden verschiedener Art. Das System ist sowohl anwendbar für private und gewerbliche Großprojekte als auch für kleinere Wohngebäude. Die Version 2023 setzt hohe Standards für ökologische, ökonomische, soziokulturelle und funktionale Aspekte während des gesamten Lebenszyklus eines Gebäudes. Die unabhängige Prüfstelle EVIDANA GmbH bewertet anhand der vorliegenden Nachweise, ob die für das jeweilige Produkt betrachteten produktbezogenen Anforderungen erfüllt sind.

Kriterium	Pos. / Relevante Bauteile / Bau-Materialien / Flächen	Betrachtete Stoffe / Aspekte	Qualitätsstufe
ENV 1.2 Risiken für die lokale Umwelt, 03.05.2024 (3. Auflage)	47c Holzwerkstoffe bei Bodenbelägen	VVOC, VOC, SVOC Emissionen und Gehalt an gefährlichen Stoffen	Qualitätsstufe: 4
Nachweis: Prüfbericht des Instituts Eurofins Product Testing A/S vom 27.04.2023. Konformitätserklärung vom 23.02.2026 bestätigt die materielle Übereinstimmung mit dem geprüften Produkt.			

Kriterium	Bewertung
ECO 1.1 Gebäudebezogene Kosten im Lebenszyklus (*)	Kann Gesamtbewertung positiv beeinflussen

Kriterium	Bewertung
ENV 1.1 Klimaschutz und Energie (*)	Kann Gesamtbewertung positiv beeinflussen

Kriterium	Bewertung
SOC 2.1 Barrierefreiheit (*)	Kann Gesamtbewertung positiv beeinflussen

Kriterium	Bewertung
SOC 1.3 Schallschutz und akustischer Komfort (*)	Kann Gesamtbewertung positiv beeinflussen

Kriterium	Qualitätsstufe
ENV 1.3 Verantwortungsbewusste Ressourcengewinnung	Kann Gesamtbewertung positiv beeinflussen
Nachweis: FSC SGSCH-COC-001258 vom 27.December 2022	

Kriterium	Pos. / Relevante Bauteile / Bau-Materialien / Flächen	Betrachtete Stoffe / Aspekte	Qualitätsstufe
ENV 1.2 Risiken für die lokale Umwelt, 29.05.2025 (4. Auflage)	47c Bodenbeläge in der Innenanwendung (aus Holzwerkstoffen)	VVOC, VOC, SVOC Emissionen und Gehalt an gefährlichen Stoffen	Qualitätsstufe: 4
Nachweis: Prüfbericht des Instituts Eurofins Product Testing A/S vom 27.04.2023. Konformitätserklärung vom 23.02.2026 bestätigt die materielle Übereinstimmung mit dem geprüften Produkt.			

SENTINEL HOLDING
INSTITUT

Produkt:
Barlinek Naturholzböden - Wood Floors

SHI Produktpass-Nr.:
14296-10-1001

Barlinek
WOODEN FLOORS

DGNB Neubau 2018

Das DGNB-System (Deutsche Gesellschaft für Nachhaltiges Bauen) bewertet die Nachhaltigkeit von Gebäuden verschiedener Art. Das System ist sowohl anwendbar für private und gewerbliche Großprojekte als auch für kleinere Wohngebäude. Die unabhängige Prüfstelle EVIDANA GmbH bewertet anhand der vorliegenden Nachweise, ob die für das jeweilige Produkt betrachteten produktbezogenen Anforderungen erfüllt sind.

Kriterium	Pos. / Relevante Bauteile / Bau-Materialien / Flächen	Betrachtete Stoffe / Aspekte	Qualitätsstufe
ENV 1.2 Risiken für die lokale Umwelt	47a Industriell hergestellte Erzeugnisse Serienerzeugnisse / Fertigprodukte aus Holzwerkstoffen in Innenräumen: Spanplatten, Furnierplatten, Faserplatten	Formaldehyd	Qualitätsstufe: 4
Nachweis: Prüfbericht des Instituts Eurofins Product Testing A/S vom 27.04.2023. Konformitätserklärung vom 23.02.2026 bestätigt die materielle Übereinstimmung mit dem geprüften Produkt.			

SENTINEL HOLDING
INSTITUT

Produkt:
Barlinek Naturholzböden - Wood Floors

SHI Produktpass-Nr.:
14296-10-1001

Barlinek
WOODEN FLOORS

BNB-BN Neubau V2015

Das Bewertungssystem Nachhaltiges Bauen ist ein Instrument zur Bewertung von Büro- und Verwaltungsgebäuden, Unterrichtsgebäuden, Laborgebäuden sowie Außenanlagen in Deutschland. Das BNB wurde vom damaligen Bundesministerium für Umwelt, Naturschutz, Bau und Reaktorsicherheit (BMUB) entwickelt und unterliegt heute dem Bundesministerium für Wohnen, Stadtentwicklung und Bauwesen. Die unabhängige Prüfstelle EVIDANA GmbH bewertet anhand der vorliegenden Nachweise, ob die für das jeweilige Produkt betrachteten produktbezogenen Anforderungen erfüllt sind.

Kriterium	Pos. / Bauprodukttyp	Betrachtete Schadstoffgruppe	Qualitätsniveau
1.1.6 Risiken für die lokale Umwelt	2b Bodenbeläge aus Holzwerkstoffen – auch Systeme	VOC / gefährliche Stoffe	Qualitätsniveau 3
Nachweis: Prüfbericht des Instituts Eurofins Product Testing A/S vom 27.04.2023. Konformitätserklärung vom 23.02.2026 bestätigt die materielle Übereinstimmung mit dem geprüften Produkt.			

Kriterium	Bewertung
1.1.7 Nachhaltige Materialgewinnung	Kann Gesamtbewertung positiv beeinflussen
Nachweis: FSC SGSCH-COC-001258 vom 27.December 2022	

SENTINEL HOLDING
INSTITUT

Produkt:
Barlinek Naturholzböden - Wood Floors

SHI Produktpass-Nr.:
14296-10-1001

Barlinek
WOODEN FLOORS

EU-Taxonomie

Die EU-Taxonomie ist ein Klassifikationssystem für ökologisch nachhaltige Wirtschaftstätigkeiten. Für bestimmte Bauaktivitäten enthalten die technischen Bewertungskriterien auch produktbezogene Anforderungen an eingesetzte Bauprodukte und -materialien, unter anderem hinsichtlich Formaldehyd und krebserregender flüchtiger organischer Verbindungen (VOC). Die unabhängige Prüfstelle EVIDANA GmbH bewertet anhand der vorliegenden Nachweise, ob die für das jeweilige Produkt betrachteten produktbezogenen Anforderungen erfüllt sind.

Kriterium	Produkttyp	Betrachtete Stoffe	Bewertung
DNSH - Vermeidung und Verminderung der Umweltverschmutzung	Bodenbeläge	Stoffe nach Anlage C, Formaldehyd, Karzinogene VOC Kategorie 1A/1B	Erfüllt
Nachweis: Herstellererklärung vom 23.02.2026			

SENTINEL HOLDING
INSTITUT

Produkt:
Barlinek Naturholzböden - Wood Floors

SHI Produktpass-Nr.:
14296-10-1001

Barlinek
WOODEN FLOORS

BREEAM DE Neubau 2018

BREEAM (Building Research Establishment Environmental Assessment Methodology) ist ein britisches Gebäudebewertungssystem, welches die Nachhaltigkeit von Neubauten, Sanierungsprojekten und Umbauten einstuft. Das Bewertungssystem wurde vom Building Research Establishment (BRE) entwickelt und zielt darauf ab, ökologische, ökonomische und soziale Auswirkungen von Gebäuden zu bewerten und zu verbessern. Die unabhängige Prüfstelle EVIDANA GmbH bewertet anhand der vorliegenden Nachweise, ob die für das jeweilige Produkt betrachteten produktbezogenen Anforderungen erfüllt sind.

Kriterium	Produktkategorie	Betrachtete Stoffe	Qualitätsstufe
Hea 02 Qualität der Innenraumluft	Bodenbeläge (einschließlich Bodenspachtelmassen und Harzböden)	Emissionen: Formaldehyd, TVOC, TSVOC, Krebserregende Stoffe	herausragende Qualität
Nachweis: Prüfbericht des Instituts Eurofins Product Testing A/S vom 27.04.2023. Konformitätserklärung vom 23.02.2026 bestätigt die materielle Übereinstimmung mit dem geprüften Produkt.			

SENTINEL HOLDING
INSTITUT

Produkt:
Barlinek Naturholzböden - Wood Floors

SHI Produktpass-Nr.:
14296-10-1001

Barlinek
WOODEN FLOORS

LEED v4.1

LEED (Leadership in Energy and Environmental Design) ist ein international anerkanntes Gebäudezertifizierungssystem des U.S. Green Building Council. Es zählt zu den weltweit am weitesten verbreiteten Nachhaltigkeitsstandards für Gebäude und wird insbesondere bei international ausgerichteten Projekten eingesetzt. LEED bewertet Gebäude ganzheitlich in Kategorien wie Energieeffizienz, Ressourcenschonung, Materialauswahl, Innenraumqualität und Standortqualität. Je nach erreichter Punktzahl werden die Zertifizierungsstufen LEED Certified, Silver, Gold oder Platinum vergeben. Die unabhängige Prüfstelle EVIDANA GmbH bewertet anhand der vorliegenden Nachweise, ob die für das jeweilige Produkt betrachteten produktbezogenen Anforderungen erfüllt sind.

Kriterium	Produktkategorie	Betrachtete Stoffe	Bewertung
EQ Credit: Low-Emitting Materials	Bodenbeläge	Emissionen: Formaldehyd, VOC, Krebserregende Stoffe	Erfüllt
Nachweis: Prüfbericht des Instituts Eurofins Product Testing A/S vom 27.04.2023. Konformitätserklärung vom 23.02.2026 bestätigt die materielle Übereinstimmung mit dem geprüften Produkt.			

SENTINEL HOLDING
INSTITUT

Produkt:
Barlinek Naturholzböden - Wood Floors

SHI Produktpass-Nr.:
14296-10-1001

Barlinek
WOODEN FLOORS

Produktsiegel

In der Baubranche spielt die Auswahl qualitativ hochwertiger Materialien eine zentrale Rolle für die Gesundheit in Gebäuden und deren Nachhaltigkeit. Produktlabels und Zertifikate bieten Orientierung, um diesen Anforderungen gerecht zu werden. Allerdings besitzt jedes Zertifikat und Label eigene Prüfkriterien, die genau betrachtet werden sollten, um sicherzustellen, dass sie den spezifischen Bedürfnissen eines Bauvorhabens entsprechen.

Dieses Produkt ist schadstoffgeprüft und wird vom Sentinel Holding Institut empfohlen. Gesundes Bauen, Modernisieren und Betreiben von Immobilien erfolgt dank des Sentinel Holding Konzepts nach transparenten und nachvollziehbaren Kriterien.

Produkte mit dem QNG-ready Siegel des Sentinel Holding Instituts eignen sich für Projekte, für welche das Qualitätssiegel Nachhaltiges Gebäude (QNG) angestrebt wird. QNG-ready Produkte erfüllen die Anforderungen des QNG Anhangdokument 3.1.3 "Schadstoffvermeidung in Baumaterialien". Das KfW-Kreditprogramm Klimafreundlicher Neubau mit QNG kann eine höhere Fördersumme ermöglichen.

Das Zeichen des Forest Stewardship Council zeichnet Holz und holzhaltige (Misch-)Produkte aus, die aus nachhaltiger überwachter Forstwirtschaft stammen. Gesundheitliche Kriterien spielen keine Rolle.

Das Instytut Techniki Budowlanej (ITB) ist das führende polnische Institut für Bautechnik und agiert unter der Autorität des Ministeriums für Entwicklung und Technologie der Republik Polen. Als notifizierte und akkreditierte Prüfstelle bewertet und verifiziert das ITB Umweltproduktdeklarationen (EPD) gemäß ISO 14025 und EN 15804. Damit trägt das Institut wesentlich zur Transparenz und Vergleichbarkeit ökologischer Produktinformationen bei und unterstützt Hersteller sowie Planer bei der nachhaltigen Bewertung von Bauprodukten im europäischen Kontext.

Produkt:
Barlinek Naturholzböden - Wood Floors

SHI Produktpass-Nr.:
14296-10-1001

Rechtliche Hinweise

(*) Die Kriterien dieses Steckbriefs beziehen sich auf das gesamte Bauobjekt. Die Bewertung erfolgt auf Gebäudeebene. Im Rahmen einer sachgemäßen Planung und fachgerechten Installation können einzelne Produkte zur Erfüllung der jeweils relevanten Anforderungen und damit zum Gesamtergebnis der Gebäudebewertung beitragen.

Die produktbezogene Bewertung erfolgt durch die unabhängige Prüfstelle EVIDANA GmbH auf Grundlage der vorliegenden Herstellerunterlagen, Nachweise und – sofern erforderlich – ergänzender Prüfungen.

Alle Kriterien finden Sie unter:
www.sentinel-holding.eu/pruefkriterien

Herausgeber

Sentinel Holding Institut GmbH
Bötzinger Str. 38
79111 Freiburg im Breisgau
Tel.: +49 761 590 481-70
info@sentinel-holding.eu
www.sentinel-holding.eu

Barlinek

Kielce 23.02.2026

SUPPLIER'S STATEMENT

We confirm that we do not intentionally add or anticipate the presence of substances subject to the restrictions listed below in the Barlinek products as outlined in the Attachment.

This information is based on current data from our suppliers regarding the product ingredients used in the production of Barlinek floorboards and our understanding of our manufacturing processes. Also, we do not introduce the following restricted substances in our production process, covering both the product itself and its packaging.

However, we would like to clarify that Barlinek does not routinely conduct analyses to detect these substances, so we are unable to formally confirm or guarantee their absence (this applies to both the product itself and its packaging):

If you have any further inquiries, please don't hesitate to contact us at:
dariusz.wojdat@barlinek.com.pl

This declaration applies to the following restricted substances:

REACH
All the products listed above comply with the criteria outlined in Regulation (EC) No 1907/2006 of the European Parliament and of the Council of 18 December 2006 on the Registration, Evaluation, Authorisation and Restriction of Chemicals (REACH), as amended. They do not contain any chemicals identified as substances of very high concern (SVHC) listed in the REACH candidate list of restrictions, Annex XVII, and Annex XIV, and specifically they do not contain any authorised chemicals listed in Annex XIV of REACH at a concentration exceeding 0.1% by weight.

a) they do not contain any authorised chemicals listed in Annex XIV of REACH at a concentration exceeding 0.1% by weight.
b) they do not contain any chemicals listed in Annex XVII of REACH at a concentration exceeding 0.1% by weight.

and / or

c) the products listed below contain substances listed in Annex XVII of REACH at a concentration exceeding 0.1% by weight. However, restrictions related to such substances do not apply to the products within the scope and their uses. Product code / Substance Cas No. / Concentration (by weight %):

Barlinek

.....N/A.....

d) they do not contain any substances at a concentration exceeding 0.1% by weight listed on the REACH list of substances of very high concern (SVHC)

e) they do not contain any substances at a concentration exceeding 0.1% by weight listed on the REACH candidate list of substances of very high concern (SVHC)

TECHNICAL
Adviser Manager
Barlinek S.A.
Dariusz Wojdat

Signature of the Supplier's Representative

BARLINEK S.A.
25-323 Kielce, Al. Solidarnosci 36
NIP 959-08-21-486
tel. +48 41 333-11-11, fax 333-00-00
(MZ-2)

PM/06/02/STA/2026

Certificate SGSCH-COC-001258

The Organization

Barlinek S.A.

Al. Solidarności 36, 25-323 Kielce, PL

has been assessed and certified as meeting the requirements of

FSC™ Chain-of-Custody

The company was assessed against the following standards
FSC-STD-40-004 V3-1 - Chain of Custody Certification
FSC-STD-50-001 Requirements for use of the FSC trademarks by Certificate Holders

for the products detailed in the scope below:

Zakup, zewnętrzne magazynowanie i sprzedaż (system transferowy) drewnianej deski warstwowej, drewnianej deski warstwowej, WSPC, listew podłogowych, pelletu, płyty pilśniowej FSC 100% lub kategorii FSC Mix.

Purchase, outsourced storage and sale (transfer system) of FSC 100% and FSC Mix: multilayer floor boards, WSPC Bonded floor panels, skirting, pellets and fibreboard.

This certificate is valid from 27 December 2022 until 26 December 2027 and remains valid subject to satisfactory surveillance audits.

Issue 7. Certified since 25 December 2002

Authorised by	Authorised by
Sylvie Seisun	Christian Kobel

SGS Société Générale de Surveillance SA
1, Place des Alpes, 1201 Geneva, Switzerland
t +41 (0)22 739 91 11 - www.sgs.com

The validity of this certificate shall be verified on http//info.fsc.org/ For the full list of product groups covered by the certificate see http//info.fsc.org/ This certificate itself does not constitute evidence that a particular product supplied by the certificate holder is FSC-certified [or FSC Controlled Wood]. Products offered shipped or sold by the certificate holder can only be considered covered by the scope of this certificate when the required FSC claim is clearly stated on sales and delivery documents. The certificate remains the property of SGS . The certificates and all copies or reproductions shall be returned or destroyed if requested by SGS

FSC
www.fsc.org
FSC™ A000531
The mark of responsible forestry

This document is an authentic electronic certificate for Client' business purposes use only. Printed version of the electronic certificate are permitted and will be considered as a copy. This document is issued by the Company subject to SGS General Conditions of certification services available on Terms and Conditions | SGS. Attention is drawn to the limitation of liability, indemnification and jurisdictional clauses contained therein. This document is copyright protected and any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful.

Type III Environmental Product Declaration No. 632/2024

Issuance date: 30.04.2024
Validity date: 30.04.2029

Three-layer wooden parquet board

Owner of the EPD :

Barlinek Invest LLC
Address: Hetman Mazepa (Chekhova)
7 V, Vinnytsia
21034 Ukraine
Tel.: +38 0432 55 33 00
Website: www.barlinek.com.ua
Contact: office.ua@barlinek.com

EPD Program Operator :

Instytut Techniki Budowlanej (ITB)
Address: Filtrowa 1
00-611 Warsaw, Poland
Website: www.itb.pl
Contact: energia@itb.pl

ITB is the verified member of The European Platform for EPD program operators and LCA practitioner www.eco-platform.org

Basic information

This declaration is the Type III Environmental Product Declaration (EPD) based on EN 15804 + A2 and verified according to ISO 14025 by an external auditor. It contains the information on the impacts of the declared construction materials on the environment and their aspects verified by the independent body according to ISO 14025. Basically, comparison or evaluation of EPD data is possible only if all the compared data were created according to EN 15804 + A2.

Life cycle analysis (LCA):	A1-A5, B1-B7, C1-C4 and D modules in accordance with EN 15804 + A2 (Cradle to Grave with module D)
Year of EPD preparation:	2024
Product standard:	EN 13489: 2023
Reference Service Life (RSL):	> 30 years
PCR:	ITB-PCR A, v. 1.6
Declared unit:	1 m^2
Reasons for performing LCA:	B2B
Representativeness:	Ukraine, European

MANUFACTURER

Barlinek Invest LLC is a Ukrainian manufacturer of layered wooden floors. As well as the Barlinek parquet boards, the group also produces certified flooring for sporting facilities, skirting boards and wood biofuels – wood pellet. Barlinek has also initiated many programmes concerning environmental protection and ecological education. For many years now the company has been conducting its 1 for 1 programme, whereby the planting of one tree is co-financed for each purchased pack of Barlinek parquet boards marked with a logo of this pro-ecological initiative.

Barlinek parquet boarding:

- ✓ possible to lay over underfloor heating
- ✓ solid construction
- ✓ floor resistant to changes in temperature and humidity
- ✓ fast and easy DIY installation
- ✓ product ready to use immediately after installation
- ✓ possible to renovate

Fig. 1. Cross structure of 3-layer wooden floorboard produced by Barlinek Invest LLC

Barlinek parquet board is made from three layers of real wood arranged in a cross structure (Fig. 1) in order to prevent swelling, squeaking or drying out causing splits. The cross construction reduces natural tension and compression of wood, provides a balance between the layers of the board, and thus guarantees the stability of the floor, even under changing weather conditions outside. The Barlinek parquet board's layered structure ensures the floor's stability and is suited for underfloor heating. The parquet boards are joined using 5Gc joints and Barclik (Fig. 2) which allow to lay the floor without most of the tools which are usually necessary to install a floor. Specification of the product is shown in Table 1.

Fig. 2. Views of Barlinek floorboards with 5Gc BARLOCK and BARCLIK systems

Joints – 5Gc BARLOCK & BARCLIK systems provide:

- fast & easy installation
- reductions of contamination
- possibility to lay again
- reduction of damage risk during installation or dismantling

PRODUCTS DESCRIPTION AND APPLICATION

Table 1. Specification of 3-layer wooden parquet board produced by Barlinek Invest LLC

3-LAYER WOODEN PARQUET BOARD	
Series:	Advance, Décor, Easy Basic, Easy Classic, Life, Pure, Pure Vintage Line, Pure Classico Line, Senses, Sport Extreme, Sport Training, Tastes of Life and others
Wood species:	oak, beech, birch, ash, maple
Finishing:	Lacquer: standard, matt, high-gloss, structural, economy, investment, professional, ultra matt Oil: UV oil, OXY oil Natural or coloured, unfinished
Colour:	Natural, white, brown, light brown, dark brown, smoked effect, cognac, cream, cream white-wash, espresso, gold, graphite, coffee, creamy-beige, honey, olive, grey, walnut, gold-brown, row effect, extreme white, grey beige, oak effect
Length [mm]	660, 725, 1092, 1800, 2200
Width [mm]	110, 130, 155, 180, 207
Thickness [mm]	10, 14, 18

The Barlinek parquet board can be installed in a floating system, that is glueless and based on modern tongue-and-groove joints. It is a method, that allows to install the floor yourself. The floor is also easy to be dismantled or re-installed. An alternative is to install the floor in a traditional way - by gluing the boards to the subfloor, which ensures stability of the installation even on large surfaces. The Barlinek parquet board does not require any additional preservative treatment. The floor is ready for use immediately after installation. The performance of the product is listed in Table 2.

Fig. 3. The view of 3-layer wooden floorboard produced by Barlinek Invest LLC during installation

Table 2. Performance of 3-layer wooden parquet board produced by Barlinek Invest LLC

Characteristics	Declared performance	Harmonized standard
Reaction to fire	Dfl – s1	EN 14342: 2013
Minimal density	500 kg/m^3	
Minimal thickness	10 mm	
Release of formaldehyde	E-1	
Content of pentachlorophenol	≤ 5 ppm	
Thermal conductivity	0,14 W/mK	

More information can be found on the Barlinek Invest LLC website: www.barlinek.com.ua

LIFE CYCLE ASSESSMENT (LCA) – general rules applied

Declared Unit

The declaration refers to declared unit (DU) – 1 m^2 of 3-layer wooden parquet board with thickness of 10 mm, 14 mm and 18 mm

Allocation

The allocation rules used for this EPD are based on general ITB-PCR A, v 1.6. 3-layer wooden parquet board production is a line process with multiple co-products in one factory located in Barlinek (Ukraine). Allocation is done on product mass basis.
All impacts from raw materials extraction and processing are allocated in A1 module of EPD. 99 % of impacts from line production were inventoried and allocated to all 3-layer wooden parquet board production. Municipal waste and waste water of whole factory were allocated to module A3. Energy supply was inventoried for whole production process. Emissions in Barlinek Invest are measured and were allocated to module A3. Packaging materials were not taken into consideration They are recycled in a closed loop.

System limits

The life cycle analysis (LCA) of the declared products covers product stage – modules A1-A5, use stages – modules B1-B7, end of life – modules C1-C4 and benefits and loads beyond the system boundary – module D (Cradle to Grave with module D) in accordance with EN 15804 + A2 and ITB PCR A, v. 1.6. The details of systems limits are provided in product technical report. All materials and energy consumption inventoried in factory were included in calculation. Office impacts were also taken into consideration. In the assessment, all significant parameters from gathered production data are considered, i.e. all material used per formulation, utilised thermal energy, internal fuel and electric power consumption, direct production waste, and all available emission measurements. It can be assumed that the total sum of omitted processes does not exceed 5 % of all impact categories. In accordance with EN 15804 + A2, machines and facilities (capital goods) required for the production as well as transportation of employees were not included in LCA.

Modules A1 and A2: *Raw materials supply and transport*

Raw materials such as softwood and hardwood logs come from local suppliers while some additives and ancillary items come from foreign countries. Data on transport of the different products to the manufacturing plants is collected and modelled for factory by assessor. Means of transport include small trucks < 10 t (f. ex. couriers), average truck (10-16 t) and big truck (> 16 t) are applied. European standards for average combustion were used for calculations.

Module A3: *Production*

The Fig. 4 shows the working process during the production of the 3-layer wooden parquet boards. The floor manufacturing is basically a three step process including drying, milling and finishing. Lumber logs are delivered to factory located in Vinnytsia, where they are fed into a stacking machine prior to drying. Dried lumber then undergoes planning, ripping, trimming and moulding during milling to produce unfinished flooring boards which are future used for the production of 3-layer parquet

boards. Then the flooring product is sorted by grade and type, packaged and then stored prior to the shipment of the final product. The facility is PN-EN ISO 9001 certified.

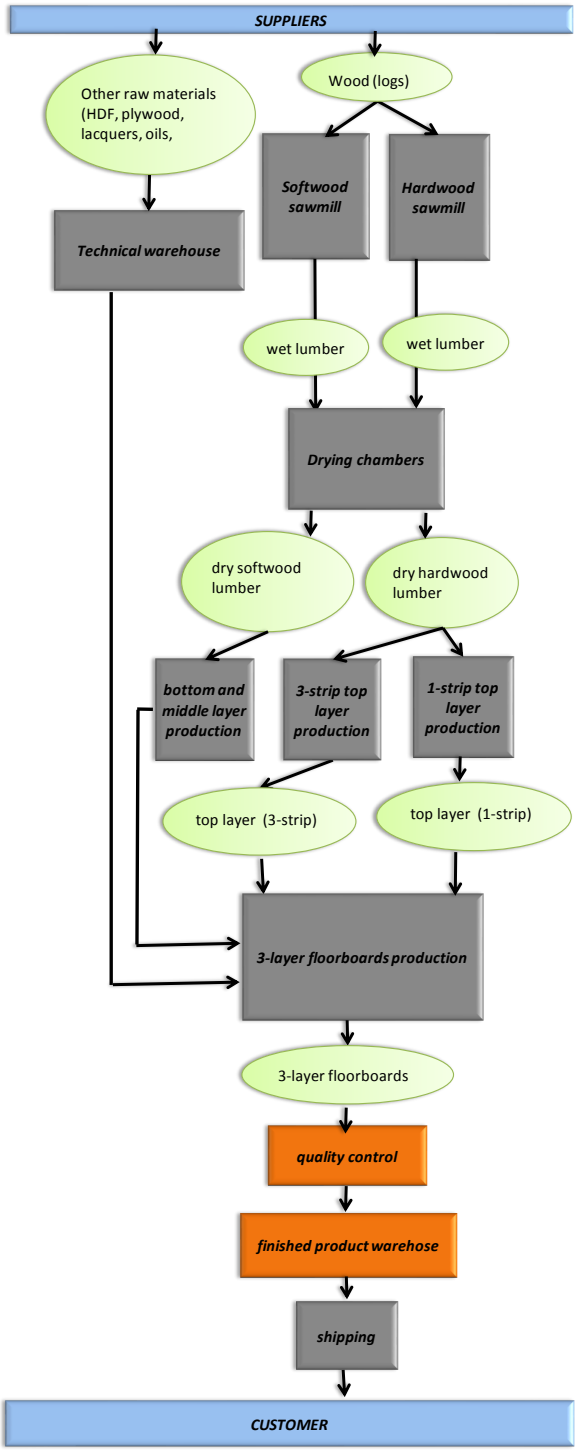

Fig. 4. A scheme of the 3-layer wooden parquet board production by Barlinek Invest factory (Ukraine)

Modules A4-A5: *Construction stage*

Transport of the 3-layer wooden parquet board from factory gate to the place of installation was considered. Parquet boards are delivered to Ukraine as well as foreign recipients. Means of transport

include truck (Euro 6), loaded in 90%, was assumed to cover an average distance of 500 km (module A4).

3-layer wooden parquet boards are delivered to an installation site in the form of elements ready for assembly. The installation process must be performed according to the instruction provided by manufacturer. Considered environmental burdens are associated with the use of ancillary materials (transport of glues, protective tapes or floor underlays) and energy consumption associated the use of power assembly tools (module A5).

Any scenarios included for A4 and A5 shall be based on the specific conditions for the RSL.

Modules B1-B7 : *Use stages*

In the use stage all impacts related to the use of the 3-layer wooden parquet board over it entire life cycle are presented. This includes provisions for the transport of all materials as well as the energy and water impact associated with use it. There are no consumables, repair or replacements related to the use of 3-layer wooden parquet board for the period of the reference service life (RLS), hence module B1 and modules B3-B5 have zero impacts.

A scenario was assumed that the floor is oiled/varnished once every three years assuming RLS of 30 years (i.e. ten cycles) and double oil/varnish application. These activities are presented in module B2. Moreover, 3-layer wooden parquet board do not use energy or water during their service life and there are no emissions released from the product during the use.

There are no energy use to operate building integrated technical systems like energy use for electrical components e.g. electrical motors. Therefore, module B6 has zero impacts. Replacement of the product due to aesthetic reasons (change of interior design) and not related to the loss of performance is not taken into account. Module B7 covers water consumption in the use phase, i.e. the use of domestic hot water and detergent for washing parquet boards according to floor care instructions recommended by the manufacturer. The scenario assumes washing the floor once a week and using a floor care agent with a capacity of 500 m^2/l. Any scenarios included for B1-B7 shall be based on the specific conditions for the RSL.

Modules C1-C4 and D: *End-of-life (EoL)*

In the adapted scenario, deconstruction of the 3-layer wooden parquet boards is performed with the use of electrical tools (module C1). The resulting waste is transported to a waste processing plant distant about 100 km, on 16-32 t lorry EURO 6 (module C2). It is assumed that at the EoL cycle 90% of the 3-layer wooden parquet boards are recovered in municipal incineration (module C3) while the residues undergo landfilling (10%) of the wooden parquet boards are stored in landfills (module C4). Module D presents credits resulting from the benefits from avoided thermal energy production (gas).

Data quality

The data selected for LCA originate from ITB-LCI questionnaires completed by Barlinek Invest LLC using the inventory data, ITB and Ecoinvent v. 3.10 databases. No specific data collected is older than five years and no generic datasets used are older than ten years. The representativeness, completeness, reliability, and consistency are judged as good. Ukrainian electricity was calculated based on Ecoinvent v. 3.10 data.

Data collection period

Primary data provided by Barlinek Invest LLC covers a period of 01.01.2022 – 31.12.2022 (1 year). The life cycle assessments were prepared for Ukraine and Europe as reference area.

Assumptions and estimates

The impacts of the representative 3-layer wooden parquet board were aggregated using weighted average. Impacts were inventoried and calculated for all products in 3-layer wooden parquet board product group.

Calculation rules

LCA was performed using ITB-LCA tool developed in accordance with EN 15804 + A2.

Databases

The data for the processes comes from Ecoinvent v. 3.10 and ITB-Database. Specific data quality analysis was a part of external audit.

LIFE CYCLE ASSESSMENT (LCA) – Results

Declared unit

The declaration refers to declared unit (DU) – 1 m^2 of 3-layer wooden parquet board with thickness of 10 mm, 14 mm and 18 mm manufactured by Barlinek Invest LLC

Table 3. System boundaries for the environmental characteristic for 3-layer wooden parquet board manufactured by Barlinek Invest LLC

Environmental assessment information (MD – Module Declared, MND – Module Not Declared, INA – Indicator Not Assessed)																
Product stage			Construction process		Use stage							End of life				Benefits and loads beyond the system boundary
Raw material supply	Transport	Manufacturing	Transport to construction site	Construction-installation process	Use	Maintenance	Repair	Replacement	Refurbishment	Operational energy use	Operational water use	Deconstruction demolition	Transport	Waste processing	Disposal	Reuse-recovery-recycling potential
A1	**A2**	**A3**	**A4**	**A5**	**B1**	**B2**	**B3**	**B4**	**B5**	**B6**	**B7**	**C1**	**C2**	**C3**	**C4**	**D**
MD	**MD**	**MD**	**MD**	**MD**	**MD**	**MD**	**MD**	**MD**	**MD**	**MD**	**MD**	**MD**	**MD**	**MD**	**MD**	**MD**

Table 4. LCA results of 3-layer parquet board with thickness of 10 mm - environmental impacts (DU = 1 m²)

Indicator	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3
Global Warming Potential	eq. kg CO_2	-5.67E+00	3.31E+00	5.15E+00	2.79E+00	9.95E-01	3.69E-01	0.00E+00	1.26E+01	0.00E+00
Greenhouse gas potential - fossil	eq. kg CO_2	3.46E+00	3.31E+00	5.14E+00	1.19E+01	9.94E-01	3.69E-01	0.00E+00	9.02E+00	0.00E+00
Greenhouse gas potential - biogenic	eq. kg CO_2	-9.15E+00	1.83E-03	-4.27E-03	-9.15E+00	5.49E-04	1.98E-04	0.00E+00	-4.00E+00	0.00E+00
Global warming potential - land use and land use change	eq. kg CO_2	1.28E-01	1.05E-03	8.39E-04	1.30E-01	3.14E-04	1.35E-04	0.00E+00	7.58E+00	0.00E+00
Stratospheric ozone depletion potential	eq. kg CFC 11	3.70E-07	6.61E-08	4.08E-08	4.77E-07	1.99E-08	6.90E-09	0.00E+00	4.07E-07	0.00E+00
Soil and water acidification potential	eq. mol H+	1.92E-02	6.50E-03	4.71E-02	7.28E-02	1.95E-03	8.50E-04	0.00E+00	4.70E-02	0.00E+00
Eutrophication potential - freshwater	eq. kg P	1.25E-03	2.18E-04	3.30E-03	4.77E-03	6.52E-05	3.45E-05	0.00E+00	1.52E-03	0.00E+00
Eutrophication potential - seawater	eq. kg N	4.08E-03	1.53E-03	9.06E-03	1.47E-02	4.60E-04	1.79E-04	0.00E+00	2.68E-02	0.00E+00
Eutrophication potential - terrestrial	eq. mol N	4.11E-02	1.65E-02	8.19E-02	1.40E-01	4.97E-03	1.91E-03	0.00E+00	9.12E-02	0.00E+00
Potential for photochemical ozone synthesis	eq. kg NMVOC	1.57E-02	1.10E-02	2.48E-02	5.14E-02	3.30E-03	1.18E-03	0.00E+00	5.00E-02	0.00E+00
Potential for depletion of abiotic resources - non-fossil resources	eq. kg Sb	3.52E-05	1.09E-05	3.01E-06	4.91E-05	3.26E-06	1.53E-06	0.00E+00	4.29E-05	0.00E+00
Abiotic depletion potential - fossil fuels	MJ	6.16E+01	4.62E+01	1.38E+02	2.46E+02	1.39E+01	5.23E+00	0.00E+00	2.30E+02	0.00E+00
Water deprivation potential	eq. m^3	2.29E+00	2.23E-01	1.13E+00	3.64E+00	6.67E-02	3.07E-02	0.00E+00	9.75E+00	0.00E+00

Indicator	Unit	B4	B5	B6	B7	C1	C2	C3	C4	D
Global Warming Potential	eq. kg CO_2	0.00E+00	0.00E+00	0.00E+00	1.08E+00	1.73E-02	1.92E-03	1.06E+01	8.54E-02	4.14E+00
Greenhouse gas potential - fossil	eq. kg CO_2	0.00E+00	0.00E+00	0.00E+00	1.01E+00	1.73E-02	1.92E-03	1.14E-01	9.93E-03	-6.39E+00
Greenhouse gas potential - biogenic	eq. kg CO_2	0.00E+00	0.00E+00	0.00E+00	-2.49E-01	-3.12E-05	1.06E-06	1.05E+01	7.54E-02	1.05E+01
Global warming potential - land use and land use change	eq. kg CO_2	0.00E+00	0.00E+00	0.00E+00	7.38E-02	2.82E-06	6.06E-07	2.95E-05	7.30E-06	-4.89E-04
Stratospheric ozone depletion potential	eq. kg CFC 11	0.00E+00	0.00E+00	0.00E+00	8.46E-08	1.37E-10	3.83E-11	1.91E-09	2.22E-10	-1.91E-07
Soil and water acidification potential	eq. mol H+	0.00E+00	0.00E+00	0.00E+00	7.25E-03	1.59E-04	3.76E-06	1.16E-03	6.83E-05	-6.47E-03
Eutrophication potential - freshwater	eq. kg P	0.00E+00	0.00E+00	0.00E+00	3.60E-04	7.27E-06	1.26E-07	4.89E-05	1.89E-06	-9.44E-05
Eutrophication potential - seawater	eq. kg N	0.00E+00	0.00E+00	0.00E+00	2.15E-03	2.66E-05	8.87E-07	6.21E-04	3.02E-04	-2.12E-03
Eutrophication potential - terrestrial	eq. mol N	0.00E+00	0.00E+00	0.00E+00	1.56E-02	2.72E-04	9.58E-06	5.96E-03	2.71E-04	-2.36E-02
Potential for photochemical ozone synthesis	eq. kg NMVOC	0.00E+00	0.00E+00	0.00E+00	4.44E-03	7.84E-05	6.35E-06	1.51E-03	1.10E-04	-1.59E-02
Potential for depletion of abiotic resources - non-fossil resources	eq. kg Sb	0.00E+00	0.00E+00	0.00E+00	1.28E-05	1.01E-08	6.28E-09	2.21E-07	2.06E-08	-5.46E-06
Abiotic depletion potential - fossil fuels	MJ	0.00E+00	0.00E+00	0.00E+00	1.69E+01	4.66E-01	2.68E-02	9.56E-01	2.07E-01	-1.02E+02
Water deprivation potential	eq. m^3	0.00E+00	0.00E+00	0.00E+00	1.54E+00	3.79E-03	1.29E-04	4.81E-01	1.18E-03	3.69E-02

Table 5. LCA results of 3-layer parquet board with thickness of 10 mm - the resource use (DU = 1 m²)

Indicator	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3
Consumption of renewable primary energy - excluding renewable primary energy sources used as raw materials	MJ	9.53E+01	8.96E-01	3.99E+00	1.00E+02	2.68E-01	1.27E-01	0.00E+00	5.04E+01	0.00E+00
Consumption of renewable primary energy resources used as raw materials	MJ	8.11E+01	0.00E+00	0.00E+00	8.11E+01	0.00E+00	0.00E+00	0.00E+00	2.50E+01	0.00E+00
Total consumption of renewable primary energy resources	MJ	1.76E+02	8.96E-01	3.99E+00	1.81E+02	2.68E-01	1.27E-01	0.00E+00	9.50E+01	0.00E+00
Consumption of non-renewable primary energy - excluding renewable primary energy sources used as raw materials	MJ	2.25E+01	4.62E+01	1.38E+02	2.07E+02	1.39E+01	5.23E+00	0.00E+00	1.64E+02	0.00E+00
Consumption of non-renewable primary energy resources used as raw materials	MJ	7.86E+00	0.00E+00	2.25E-02	7.88E+00	0.00E+00	0.00E+00	0.00E+00	7.20E+01	0.00E+00
Total consumption of non-renewable primary energy resources	MJ	3.05E+01	4.62E+01	1.38E+02	2.15E+02	1.39E+01	5.23E+00	0.00E+00	2.16E+02	0.00E+00
Consumption of secondary materials	kg	4.12E-02	2.04E-02	8.84E-03	7.04E-02	6.09E-03	2.64E-03	0.00E+00	3.57E-02	0.00E+00
Consumption of renewable secondary fuels	MJ	4.34E-01	2.07E-04	3.53E-05	4.34E-01	6.18E-05	2.83E-05	0.00E+00	4.92E-04	0.00E+00
Consumption of non-renewable secondary fuels	MJ	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Net consumption of freshwater resources	m^3	5.38E-02	6.29E-03	2.34E-02	8.36E-02	1.88E-03	8.60E-04	0.00E+00	2.30E-01	0.00E+00

Indicator	Unit	B4	B5	B6	B7	C1	C2	C3	C4	D
Consumption of renewable primary energy - excluding renewable primary energy sources used as raw materials	MJ	0.00E+00	0.00E+00	0.00E+00	4.00E+00	2.70E-02	5.17E-04	-1.01E+02	-1.12E+01	-1.01E+02
Consumption of renewable primary energy resources used as raw materials	MJ	0.00E+00	0.00E+00	0.00E+00	1.89E+00	0.00E+00	0.00E+00	1.01E+02	1.12E+01	1.01E+02
Total consumption of renewable primary energy resources	MJ	0.00E+00	0.00E+00	0.00E+00	5.89E+00	1.34E-02	5.17E-04	2.16E-02	4.00E-03	-3.56E-01
Consumption of non-renewable primary energy - excluding renewable primary energy sources used as raw materials	MJ	0.00E+00	0.00E+00	0.00E+00	1.51E+01	4.66E-01	2.68E-02	9.56E-01	2.07E-01	-1.02E+02
Consumption of non-renewable primary energy resources used as raw materials	MJ	0.00E+00	0.00E+00	0.00E+00	1.93E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Total consumption of non-renewable primary energy resources	MJ	0.00E+00	0.00E+00	0.00E+00	1.70E+01	4.66E-01	2.68E-02	9.56E-01	2.07E-01	-1.02E+02
Consumption of secondary materials	kg	0.00E+00	0.00E+00	0.00E+00	4.40E-03	2.96E-05	1.17E-05	2.31E-03	7.87E-05	-1.45E-02
Consumption of renewable secondary fuels	MJ	0.00E+00	0.00E+00	0.00E+00	1.40E-04	1.16E-07	1.19E-07	5.39E-06	2.70E-06	-2.26E-05
Consumption of non-renewable secondary fuels	MJ	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Net consumption of freshwater resources	m^3	0.00E+00	0.00E+00	0.00E+00	3.37E-02	1.14E-04	3.63E-06	-1.62E-03	2.07E-04	-1.28E-02

Table 6. LCA results of 3-layer parquet board with thickness of 10 mm – waste categories (DU = 1 m^2)

Indicator	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3
Hazardous waste. neutralized	kg	1.87E-01	6.06E-02	7.70E-01	1.02E+00	1.81E-02	1.00E-02	0.00E+00	2.11E-01	0.00E+00
Non-hazardous waste. neutralised	kg	5.51E+00	1.43E+00	1.96E+01	2.66E+01	4.27E-01	2.16E-01	0.00E+00	5.45E+00	0.00E+00
Radioactive waste	kg	9.36E-03	1.78E-05	1.01E-03	1.04E-02	5.32E-06	5.67E-06	0.00E+00	6.25E-05	0.00E+00
Components for re-use	kg	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Materials for recycling	kg	1.35E-03	3.57E-04	1.49E-01	1.51E-01	1.07E-04	5.21E-05	0.00E+00	1.16E-03	0.00E+00
Materials for energy recovery	kg	7.98E-03	1.04E-06	1.09E-06	7.98E-03	3.11E-07	1.30E-07	0.00E+00	2.00E-05	0.00E+00
Energy exported	MJ	2.25E-01	6.74E-02	5.33E-02	3.46E-01	2.01E-02	9.55E-03	0.00E+00	6.49E-01	0.00E+00

Indicator	Unit	B4	B5	B6	B7	C1	C2	C3	C4	D
Hazardous waste. neutralized	kg	0.00E+00	0.00E+00	0.00E+00	4.22E-02	2.60E-03	3.50E-05	1.29E-02	1.85E-04	-5.78E-02
Non-hazardous waste. neutralised	kg	0.00E+00	0.00E+00	0.00E+00	1.48E+00	3.59E-02	8.23E-04	6.98E-02	5.62E-03	-1.15E+00
Radioactive waste	kg	0.00E+00	0.00E+00	0.00E+00	1.74E-05	3.42E-06	1.03E-08	2.78E-07	6.87E-08	-7.86E-06
Components for re-use	kg	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Materials for recycling	kg	0.00E+00	0.00E+00	0.00E+00	1.29E-03	8.03E-06	2.06E-07	1.00E-05	1.59E-06	-1.87E-04
Materials for energy recovery	kg	0.00E+00	0.00E+00	0.00E+00	2.71E-03	3.65E-09	5.99E-10	1.40E-07	6.97E-09	-1.38E-06
Energy exported	MJ	0.00E+00	0.00E+00	0.00E+00	5.24E-02	1.79E-04	3.88E-05	3.19E-04	3.65E-05	-1.47E-02

Table 7. LCA results of 3-layer parquet board with thickness of 14 mm – environmental impacts (DU = 1 m²)

Indicator	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3
Global Warming Potential	eq. kg CO_2	-8.82E+00	3.31E+00	5.15E+00	-3.60E-01	9.95E-01	3.69E-01	0.00E+00	1.26E+01	0.00E+00
Greenhouse gas potential - fossil	eq. kg CO_2	3.63E+00	3.31E+00	5.14E+00	1.21E+01	9.94E-01	3.69E-01	0.00E+00	9.02E+00	0.00E+00
Greenhouse gas potential - biogenic	eq. kg CO_2	-1.25E+01	1.83E-03	-4.27E-03	-1.25E+01	5.49E-04	1.98E-04	0.00E+00	-4.00E+00	0.00E+00
Global warming potential - land use and land use change	eq. kg CO_2	1.31E-01	1.05E-03	8.39E-04	1.32E-01	3.14E-04	1.35E-04	0.00E+00	7.58E+00	0.00E+00
Stratospheric ozone depletion potential	eq. kg CFC 11	3.82E-07	6.61E-08	4.08E-08	4.89E-07	1.99E-08	6.90E-09	0.00E+00	4.07E-07	0.00E+00
Soil and water acidification potential	eq. mol H+	2.02E-02	6.50E-03	4.71E-02	7.38E-02	1.95E-03	8.50E-04	0.00E+00	4.70E-02	0.00E+00
Eutrophication potential - freshwater	eq. kg P	1.32E-03	2.18E-04	3.30E-03	4.83E-03	6.52E-05	3.45E-05	0.00E+00	1.52E-03	0.00E+00
Eutrophication potential - seawater	eq. kg N	4.42E-03	1.53E-03	9.06E-03	1.50E-02	4.60E-04	1.79E-04	0.00E+00	2.68E-02	0.00E+00
Eutrophication potential - terrestrial	eq. mol N	4.47E-02	1.65E-02	8.19E-02	1.43E-01	4.97E-03	1.91E-03	0.00E+00	9.12E-02	0.00E+00
Potential for photochemical ozone synthesis	eq. kg NMVOC	1.72E-02	1.10E-02	2.48E-02	5.30E-02	3.30E-03	1.18E-03	0.00E+00	5.00E-02	0.00E+00
Potential for depletion of abiotic resources - non-fossil resources	eq. kg Sb	3.56E-05	1.09E-05	3.01E-06	4.96E-05	3.26E-06	1.53E-06	0.00E+00	4.29E-05	0.00E+00
Abiotic depletion potential - fossil fuels	MJ	6.40E+01	4.62E+01	1.38E+02	2.48E+02	1.39E+01	5.23E+00	0.00E+00	2.30E+02	0.00E+00
Water deprivation potential	eq. m^3	2.36E+00	2.23E-01	1.13E+00	3.71E+00	6.67E-02	3.07E-02	0.00E+00	9.75E+00	0.00E+00

Indicator	Unit	B4	B5	B6	B7	C1	C2	C3	C4	D
Global Warming Potential	eq. kg CO_2	0.00E+00	0.00E+00	0.00E+00	1.08E+00	1.73E-02	1.92E-03	1.06E+01	8.54E-02	4.14E+00
Greenhouse gas potential - fossil	eq. kg CO_2	0.00E+00	0.00E+00	0.00E+00	1.01E+00	1.73E-02	1.92E-03	1.14E-01	9.93E-03	-6.39E+00
Greenhouse gas potential - biogenic	eq. kg CO_2	0.00E+00	0.00E+00	0.00E+00	-2.49E-01	-3.12E-05	1.06E-06	1.05E+01	7.54E-02	1.05E+01
Global warming potential - land use and land use change	eq. kg CO_2	0.00E+00	0.00E+00	0.00E+00	7.38E-02	2.82E-06	6.06E-07	2.95E-05	7.30E-06	-4.89E-04
Stratospheric ozone depletion potential	eq. kg CFC 11	0.00E+00	0.00E+00	0.00E+00	8.46E-08	1.37E-10	3.83E-11	1.91E-09	2.22E-10	-1.91E-07
Soil and water acidification potential	eq. mol H+	0.00E+00	0.00E+00	0.00E+00	7.25E-03	1.59E-04	3.76E-06	1.16E-03	6.83E-05	-6.47E-03
Eutrophication potential - freshwater	eq. kg P	0.00E+00	0.00E+00	0.00E+00	3.60E-04	7.27E-06	1.26E-07	4.89E-05	1.89E-06	-9.44E-05
Eutrophication potential - seawater	eq. kg N	0.00E+00	0.00E+00	0.00E+00	2.15E-03	2.66E-05	8.87E-07	6.21E-04	3.02E-04	-2.12E-03
Eutrophication potential - terrestrial	eq. mol N	0.00E+00	0.00E+00	0.00E+00	1.56E-02	2.72E-04	9.58E-06	5.96E-03	2.71E-04	-2.36E-02
Potential for photochemical ozone synthesis	eq. kg NMVOC	0.00E+00	0.00E+00	0.00E+00	4.44E-03	7.84E-05	6.35E-06	1.51E-03	1.10E-04	-1.59E-02
Potential for depletion of abiotic resources - non-fossil resources	eq. kg Sb	0.00E+00	0.00E+00	0.00E+00	1.28E-05	1.01E-08	6.28E-09	2.21E-07	2.06E-08	-5.46E-06
Abiotic depletion potential - fossil fuels	MJ	0.00E+00	0.00E+00	0.00E+00	1.69E+01	4.66E-01	2.68E-02	9.56E-01	2.07E-01	-1.02E+02
Water deprivation potential	eq. m^3	0.00E+00	0.00E+00	0.00E+00	1.54E+00	3.79E-03	1.29E-04	4.81E-01	1.18E-03	3.69E-02

Table 8. LCA results of 3-layer parquet board with thickness of 14 mm - the resource use (DU = 1 m²)

Indicator	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3
Consumption of renewable primary energy - excluding renewable primary energy sources used as raw materials	MJ	1.31E+02	8.96E-01	3.99E+00	1.36E+02	2.68E-01	1.27E-01	0.00E+00	5.04E+01	0.00E+00
Consumption of renewable primary energy resources used as raw materials	MJ	1.08E+02	0.00E+00	0.00E+00	1.08E+02	0.00E+00	0.00E+00	0.00E+00	2.50E+01	0.00E+00
Total consumption of renewable primary energy resources	MJ	2.39E+02	8.96E-01	3.99E+00	2.44E+02	2.68E-01	1.27E-01	0.00E+00	9.50E+01	0.00E+00
Consumption of non-renewable primary energy - excluding renewable primary energy sources used as raw materials	MJ	2.49E+01	4.62E+01	1.38E+02	2.09E+02	1.39E+01	5.23E+00	0.00E+00	1.64E+02	0.00E+00
Consumption of non-renewable primary energy resources used as raw materials	MJ	7.86E+00	0.00E+00	2.25E-02	7.88E+00	0.00E+00	0.00E+00	0.00E+00	7.20E+01	0.00E+00
Total consumption of non-renewable primary energy resources	MJ	3.29E+01	4.62E+01	1.38E+02	2.17E+02	1.39E+01	5.23E+00	0.00E+00	2.16E+02	0.00E+00
Consumption of secondary materials	kg	4.32E-02	2.04E-02	8.84E-03	7.24E-02	6.09E-03	2.64E-03	0.00E+00	3.57E-02	0.00E+00
Consumption of renewable secondary fuels	MJ	4.34E-01	2.07E-04	3.53E-05	4.34E-01	6.18E-05	2.83E-05	0.00E+00	4.92E-04	0.00E+00
Consumption of non-renewable secondary fuels	MJ	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Net consumption of freshwater resources	m^3	5.47E-02	6.29E-03	2.34E-02	8.44E-02	1.88E-03	8.60E-04	0.00E+00	2.30E-01	0.00E+00

Indicator	Unit	B4	B5	B6	B7	C1	C2	C3	C4	D
Consumption of renewable primary energy - excluding renewable primary energy sources used as raw materials	MJ	0.00E+00	0.00E+00	0.00E+00	4.00E+00	2.70E-02	5.17E-04	-1.01E+02	-1.12E+01	-1.01E+02
Consumption of renewable primary energy resources used as raw materials	MJ	0.00E+00	0.00E+00	0.00E+00	1.89E+00	0.00E+00	0.00E+00	1.01E+02	1.12E+01	1.01E+02
Total consumption of renewable primary energy resources	MJ	0.00E+00	0.00E+00	0.00E+00	5.89E+00	1.34E-02	5.17E-04	2.16E-02	4.00E-03	-3.56E-01
Consumption of non-renewable primary energy - excluding renewable primary energy sources used as raw materials	MJ	0.00E+00	0.00E+00	0.00E+00	1.51E+01	4.66E-01	2.68E-02	9.56E-01	2.07E-01	-1.02E+02
Consumption of non-renewable primary energy resources used as raw materials	MJ	0.00E+00	0.00E+00	0.00E+00	1.93E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Total consumption of non-renewable primary energy resources	MJ	0.00E+00	0.00E+00	0.00E+00	1.70E+01	4.66E-01	2.68E-02	9.56E-01	2.07E-01	-1.02E+02
Consumption of secondary materials	kg	0.00E+00	0.00E+00	0.00E+00	4.40E-03	2.96E-05	1.17E-05	2.31E-03	7.87E-05	-1.45E-02
Consumption of renewable secondary fuels	MJ	0.00E+00	0.00E+00	0.00E+00	1.40E-04	1.16E-07	1.19E-07	5.39E-06	2.70E-06	-2.26E-05
Consumption of non-renewable secondary fuels	MJ	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Net consumption of freshwater resources	m^3	0.00E+00	0.00E+00	0.00E+00	3.37E-02	1.14E-04	3.63E-06	-1.62E-03	2.07E-04	-1.28E-02

Table 9. LCA results of 3-layer parquet board with thickness of 14 mm – waste categories (DU = 1 m²)

Indicator	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3
Hazardous waste. neutralized	kg	1.93E-01	6.06E-02	7.70E-01	1.02E+00	1.81E-02	1.00E-02	0.00E+00	2.11E-01	0.00E+00
Non-hazardous waste. neutralised	kg	5.70E+00	1.43E+00	1.96E+01	2.68E+01	4.27E-01	2.16E-01	0.00E+00	5.45E+00	0.00E+00
Radioactive waste	kg	9.37E-03	1.78E-05	1.01E-03	1.04E-02	5.32E-06	5.67E-06	0.00E+00	6.25E-05	0.00E+00
Components for re-use	kg	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Materials for recycling	kg	1.38E-03	3.57E-04	1.49E-01	1.51E-01	1.07E-04	5.21E-05	0.00E+00	1.16E-03	0.00E+00
Materials for energy recovery	kg	7.98E-03	1.04E-06	1.09E-06	7.98E-03	3.11E-07	1.30E-07	0.00E+00	2.00E-05	0.00E+00
Energy exported	MJ	2.31E-01	6.74E-02	5.33E-02	3.51E-01	2.01E-02	9.55E-03	0.00E+00	6.49E-01	0.00E+00

Indicator	Unit	B4	B5	B6	B7	C1	C2	C3	C4	D
Hazardous waste. neutralized	kg	0.00E+00	0.00E+00	0.00E+00	4.22E-02	2.60E-03	3.50E-05	1.29E-02	1.85E-04	-5.78E-02
Non-hazardous waste. neutralised	kg	0.00E+00	0.00E+00	0.00E+00	1.48E+00	3.59E-02	8.23E-04	6.98E-02	5.62E-03	-1.15E+00
Radioactive waste	kg	0.00E+00	0.00E+00	0.00E+00	1.74E-05	3.42E-06	1.03E-08	2.78E-07	6.87E-08	-7.86E-06
Components for re-use	kg	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Materials for recycling	kg	0.00E+00	0.00E+00	0.00E+00	1.29E-03	8.03E-06	2.06E-07	1.00E-05	1.59E-06	-1.87E-04
Materials for energy recovery	kg	0.00E+00	0.00E+00	0.00E+00	2.71E-03	3.65E-09	5.99E-10	1.40E-07	6.97E-09	-1.38E-06
Energy exported	MJ	0.00E+00	0.00E+00	0.00E+00	5.24E-02	1.79E-04	3.88E-05	3.19E-04	3.65E-05	-1.47E-02

Table 10. LCA results of 3-layer parquet board with thickness of 18 mm – environmental impacts (DU = 1 m²)

Indicator	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3
Global Warming Potential	eq. kg CO_2	-1.20E+01	3.31E+00	5.15E+00	-3.51E+00	9.95E-01	3.69E-01	0.00E+00	1.26E+01	0.00E+00
Greenhouse gas potential - fossil	eq. kg CO_2	3.80E+00	3.31E+00	5.14E+00	1.23E+01	9.94E-01	3.69E-01	0.00E+00	9.02E+00	0.00E+00
Greenhouse gas potential - biogenic	eq. kg CO_2	-1.58E+01	1.83E-03	-4.27E-03	-1.58E+01	5.49E-04	1.98E-04	0.00E+00	-4.00E+00	0.00E+00
Global warming potential - land use and land use change	eq. kg CO_2	1.33E-01	1.05E-03	8.39E-04	1.35E-01	3.14E-04	1.35E-04	0.00E+00	7.58E+00	0.00E+00
Stratospheric ozone depletion potential	eq. kg CFC 11	3.94E-07	6.61E-08	4.08E-08	5.01E-07	1.99E-08	6.90E-09	0.00E+00	4.07E-07	0.00E+00
Soil and water acidification potential	eq. mol H+	2.12E-02	6.50E-03	4.71E-02	7.48E-02	1.95E-03	8.50E-04	0.00E+00	4.70E-02	0.00E+00
Eutrophication potential - freshwater	eq. kg P	1.38E-03	2.18E-04	3.30E-03	4.90E-03	6.52E-05	3.45E-05	0.00E+00	1.52E-03	0.00E+00
Eutrophication potential - seawater	eq. kg N	4.77E-03	1.53E-03	9.06E-03	1.54E-02	4.60E-04	1.79E-04	0.00E+00	2.68E-02	0.00E+00
Eutrophication potential - terrestrial	eq. mol N	4.83E-02	1.65E-02	8.19E-02	1.47E-01	4.97E-03	1.91E-03	0.00E+00	9.12E-02	0.00E+00
Potential for photochemical ozone synthesis	eq. kg NMVOC	1.88E-02	1.10E-02	2.48E-02	5.46E-02	3.30E-03	1.18E-03	0.00E+00	5.00E-02	0.00E+00
Potential for depletion of abiotic resources - non-fossil resources	eq. kg Sb	3.60E-05	1.09E-05	3.01E-06	5.00E-05	3.26E-06	1.53E-06	0.00E+00	4.29E-05	0.00E+00
Abiotic depletion potential - fossil fuels	MJ	6.63E+01	4.62E+01	1.38E+02	2.51E+02	1.39E+01	5.23E+00	0.00E+00	2.30E+02	0.00E+00
Water deprivation potential	eq. m^3	2.44E+00	2.23E-01	1.13E+00	3.79E+00	6.67E-02	3.07E-02	0.00E+00	9.75E+00	0.00E+00

Indicator	Unit	B4	B5	B6	B7	C1	C2	C3	C4	D
Global Warming Potential	eq. kg CO_2	0.00E+00	0.00E+00	0.00E+00	1.08E+00	1.73E-02	1.92E-03	1.06E+01	8.54E-02	4.14E+00
Greenhouse gas potential - fossil	eq. kg CO_2	0.00E+00	0.00E+00	0.00E+00	1.01E+00	1.73E-02	1.92E-03	1.14E-01	9.93E-03	-6.39E+00
Greenhouse gas potential - biogenic	eq. kg CO_2	0.00E+00	0.00E+00	0.00E+00	-2.49E-01	-3.12E-05	1.06E-06	1.05E+01	7.54E-02	1.05E+01
Global warming potential - land use and land use change	eq. kg CO_2	0.00E+00	0.00E+00	0.00E+00	7.38E-02	2.82E-06	6.06E-07	2.95E-05	7.30E-06	-4.89E-04
Stratospheric ozone depletion potential	eq. kg CFC 11	0.00E+00	0.00E+00	0.00E+00	8.46E-08	1.37E-10	3.83E-11	1.91E-09	2.22E-10	-1.91E-07
Soil and water acidification potential	eq. mol H+	0.00E+00	0.00E+00	0.00E+00	7.25E-03	1.59E-04	3.76E-06	1.16E-03	6.83E-05	-6.47E-03
Eutrophication potential - freshwater	eq. kg P	0.00E+00	0.00E+00	0.00E+00	3.60E-04	7.27E-06	1.26E-07	4.89E-05	1.89E-06	-9.44E-05
Eutrophication potential - seawater	eq. kg N	0.00E+00	0.00E+00	0.00E+00	2.15E-03	2.66E-05	8.87E-07	6.21E-04	3.02E-04	-2.12E-03
Eutrophication potential - terrestrial	eq. mol N	0.00E+00	0.00E+00	0.00E+00	1.56E-02	2.72E-04	9.58E-06	5.96E-03	2.71E-04	-2.36E-02
Potential for photochemical ozone synthesis	eq. kg NMVOC	0.00E+00	0.00E+00	0.00E+00	4.44E-03	7.84E-05	6.35E-06	1.51E-03	1.10E-04	-1.59E-02
Potential for depletion of abiotic resources - non-fossil resources	eq. kg Sb	0.00E+00	0.00E+00	0.00E+00	1.28E-05	1.01E-08	6.28E-09	2.21E-07	2.06E-08	-5.46E-06
Abiotic depletion potential - fossil fuels	MJ	0.00E+00	0.00E+00	0.00E+00	1.69E+01	4.66E-01	2.68E-02	9.56E-01	2.07E-01	-1.02E+02
Water deprivation potential	eq. m^3	0.00E+00	0.00E+00	0.00E+00	1.54E+00	3.79E-03	1.29E-04	4.81E-01	1.18E-03	3.69E-02

Table 11. LCA results of 3-layer parquet board with thickness of 18 mm - the resource use (DU = 1 m²)

Indicator	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3
Consumption of renewable primary energy - excluding renewable primary energy sources used as raw materials	MJ	1.67E+02	8.96E-01	3.99E+00	1.72E+02	2.68E-01	1.27E-01	0.00E+00	5.04E+01	0.00E+00
Consumption of renewable primary energy resources used as raw materials	MJ	1.34E+02	0.00E+00	0.00E+00	1.34E+02	0.00E+00	0.00E+00	0.00E+00	2.50E+01	0.00E+00
Total consumption of renewable primary energy resources	MJ	3.01E+02	8.96E-01	3.99E+00	3.06E+02	2.68E-01	1.27E-01	0.00E+00	9.50E+01	0.00E+00
Consumption of non-renewable primary energy - excluding renewable primary energy sources used as raw materials	MJ	2.72E+01	4.62E+01	1.38E+02	2.12E+02	1.39E+01	5.23E+00	0.00E+00	1.64E+02	0.00E+00
Consumption of non-renewable primary energy resources used as raw materials	MJ	7.86E+00	0.00E+00	2.25E-02	7.88E+00	0.00E+00	0.00E+00	0.00E+00	7.20E+01	0.00E+00
Total consumption of non-renewable primary energy resources	MJ	3.52E+01	4.62E+01	1.38E+02	2.20E+02	1.39E+01	5.23E+00	0.00E+00	2.16E+02	0.00E+00
Consumption of secondary materials	kg	4.51E-02	2.04E-02	8.84E-03	7.43E-02	6.09E-03	2.64E-03	0.00E+00	3.57E-02	0.00E+00
Consumption of renewable secondary fuels	MJ	4.34E-01	2.07E-04	3.53E-05	4.34E-01	6.18E-05	2.83E-05	0.00E+00	4.92E-04	0.00E+00
Consumption of non-renewable secondary fuels	MJ	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Net consumption of freshwater resources	m^3	5.56E-02	6.29E-03	2.34E-02	8.53E-02	1.88E-03	8.60E-04	0.00E+00	2.30E-01	0.00E+00

Indicator	Unit	B4	B5	B6	B7	C1	C2	C3	C4	D
Consumption of renewable primary energy - excluding renewable primary energy sources used as raw materials	MJ	0.00E+00	0.00E+00	0.00E+00	4.00E+00	2.70E-02	5.17E-04	-1.01E+02	-1.12E+01	-1.01E+02
Consumption of renewable primary energy resources used as raw materials	MJ	0.00E+00	0.00E+00	0.00E+00	1.89E+00	0.00E+00	0.00E+00	1.01E+02	1.12E+01	1.01E+02
Total consumption of renewable primary energy resources	MJ	0.00E+00	0.00E+00	0.00E+00	5.89E+00	1.34E-02	5.17E-04	2.16E-02	4.00E-03	-3.56E-01
Consumption of non-renewable primary energy - excluding renewable primary energy sources used as raw materials	MJ	0.00E+00	0.00E+00	0.00E+00	1.51E+01	4.66E-01	2.68E-02	9.56E-01	2.07E-01	-1.02E+02
Consumption of non-renewable primary energy resources used as raw materials	MJ	0.00E+00	0.00E+00	0.00E+00	1.93E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Total consumption of non-renewable primary energy resources	MJ	0.00E+00	0.00E+00	0.00E+00	1.70E+01	4.66E-01	2.68E-02	9.56E-01	2.07E-01	-1.02E+02
Consumption of secondary materials	kg	0.00E+00	0.00E+00	0.00E+00	4.40E-03	2.96E-05	1.17E-05	2.31E-03	7.87E-05	-1.45E-02
Consumption of renewable secondary fuels	MJ	0.00E+00	0.00E+00	0.00E+00	1.40E-04	1.16E-07	1.19E-07	5.39E-06	2.70E-06	-2.26E-05
Consumption of non-renewable secondary fuels	MJ	INA	INA	INA	INA	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Net consumption of freshwater resources	m^3	0.00E+00	0.00E+00	0.00E+00	3.37E-02	1.14E-04	3.63E-06	-1.62E-03	2.07E-04	-1.28E-02

Table 12. LCA results of 3-layer parquet board with thickness of 18 mm – waste categories (DU = 1 m^2)

Indicator	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3
Hazardous waste. neutralized	kg	1.99E-01	6.06E-02	7.70E-01	1.03E+00	1.81E-02	1.00E-02	0.00E+00	2.11E-01	0.00E+00
Non-hazardous waste. neutralised	kg	5.88E+00	1.43E+00	1.96E+01	2.70E+01	4.27E-01	2.16E-01	0.00E+00	5.45E+00	0.00E+00
Radioactive waste	kg	9.37E-03	1.78E-05	1.01E-03	1.04E-02	5.32E-06	5.67E-06	0.00E+00	6.25E-05	0.00E+00
Components for re-use	kg	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Materials for recycling	kg	1.42E-03	3.57E-04	1.49E-01	1.51E-01	1.07E-04	5.21E-05	0.00E+00	1.16E-03	0.00E+00
Materials for energy recovery	kg	7.98E-03	1.04E-06	1.09E-06	7.98E-03	3.11E-07	1.30E-07	0.00E+00	2.00E-05	0.00E+00
Energy exported	MJ	2.36E-01	6.74E-02	5.33E-02	3.57E-01	2.01E-02	9.55E-03	0.00E+00	6.49E-01	0.00E+00

Indicator	Unit	B4	B5	B6	B7	C1	C2	C3	C4	D
Hazardous waste. neutralized	kg	0.00E+00	0.00E+00	0.00E+00	4.22E-02	2.60E-03	3.50E-05	1.29E-02	1.85E-04	-5.78E-02
Non-hazardous waste. neutralised	kg	0.00E+00	0.00E+00	0.00E+00	1.48E+00	3.59E-02	8.23E-04	6.98E-02	5.62E-03	-1.15E+00
Radioactive waste	kg	0.00E+00	0.00E+00	0.00E+00	1.74E-05	3.42E-06	1.03E-08	2.78E-07	6.87E-08	-7.86E-06
Components for re-use	kg	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Materials for recycling	kg	0.00E+00	0.00E+00	0.00E+00	1.29E-03	8.03E-06	2.06E-07	1.00E-05	1.59E-06	-1.87E-04
Materials for energy recovery	kg	0.00E+00	0.00E+00	0.00E+00	2.71E-03	3.65E-09	5.99E-10	1.40E-07	6.97E-09	-1.38E-06
Energy exported	MJ	0.00E+00	0.00E+00	0.00E+00	5.24E-02	1.79E-04	3.88E-05	3.19E-04	3.65E-05	-1.47E-02

Verification

The process of verification of this EPD is in accordance with ISO 14025 and ISO 21930.
After verification, this EPD is valid for a 5-year-period. EPD does not have to be recalculated after 5 years, if the underlying data have not changed significantly.

The basis for LCA analysis was EN 15804 + A2 and ITB PCR A
Independent verification corresponding to ISO 14025 (subclause 8.1.3) [x] external [ ] internal
External verification of EPD: Halina Prejzner, PhD Eng LCA, LCI audit and input data verification: Mateusz Kozicki, PhD Verification of LCA: Michał Piasecki, PhD, D.Sc. Eng

Note 1: The declaration owner has the sole ownership, liability and responsibility for the information provided and contained in EPD. Declarations within the same product category but from different programs may not be comparable. Declarations of construction products may not be comparable if they do not comply with EN 15804 + A2. For further information about comparability, see EN 15804 + A2 and ISO 14025. Depending on the application, a corresponding conversion factor such as the specific weight per surface area must be taken into consideration.

Note 2: ITB is a public Research Organization and Notified Body (EC Reg. no 1488) to the European Commission and to other Member States of the European Union designated for the tasks concerning the assessment of building products' performance. ITB acts as the independent, third-party verification organization (17065/17025 certified). ITB-EPD program is recognized and registered member of The European Platform – Association of EPD program operators and ITB-EPD declarations are registered and stored in the international ECO-PORTAL.

Normative references

- ITB PCR A, v. 1.6 General Product Category Rules for Construction Products
- EN 13489:2023 Wood-flooring and parquet - Multi-layer parquet elements
- ISO 14025:2006, Environmental labels and declarations – Type III environmental declarations – Principles and procedures
- ISO 21930:2017 Sustainability in buildings and civil engineering works – Core rules for environmental product declarations of construction products and services
- ISO 14044:2006 Environmental management – Life cycle assessment – Requirements and guidelines
- ISO 15686-1:2011 Buildings and constructed assets – Service life planning – Part 1: General principles and framework
- ISO 15686-8:2008 Buildings and constructed assets – Service life planning – Part 8: Reference service life and service-life estimation
- EN 15804 + A2: Sustainability of construction works – Environmental product declarations – Core rules for the product category of construction products
- ISO 14067:2018 Greenhouse gases — Carbon footprint of products — Requirements and guidelines for quantification
- PN-EN 15942:2012 Sustainability of construction works – Environmental product declarations – Communication format business-to-business

Instytut Techniki Budowlanej

Instytut Techniki Budowlanej
00-611 Warsaw, Filtrowa 1

Thermal Physics, Acoustics and Environment Department
02-656 Warsaw, Ksawerów 21

CERTIFICATE № 632/2024
of TYPE III ENVIRONMENTAL DECLARATION

Products:

Three-layer wooden parquet board

Manufacturer:

Barlinek Invest LLC

Hetman Mazepa (Chekhova) 7 V, Vinnysia, Ukraine

confirms the correctness of the data included in the development of
Type III Environmental Declaration and accordance with the requirements of the standard

EN 15804+A2

Sustainability of construction works.
Environmental product declarations.
Core rules for the product category of construction products.

This certificate, issued on 30th April 2024 is valid for 5 years
or until amendment of mentioned Environmental Declaration

Head of the Thermal Physic, Acoustics
and Environment Department
Agnieszka Winkler-Skalna, PhD

INSTYTUT TECHNIKI BUDOWLANEJ

Deputy Director
for Research and Innovation
Krzysztof Kuczyński, PhD

Warsaw, April 2024