


Domestic users / Lights & Floodlights / Outdoor Lights / L 15

## L 15

### Information copy

The good old days. Classic outdoor SensorLight L 15, ideal for building fronts and entrances, 180° angle of coverage, reach up to 10 m, selectable time and twilight threshold, sensor tilts through 90° for exact adjustment of the detection zone.

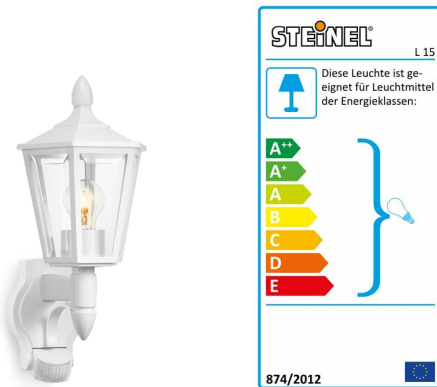

### Details

**3 JAHRE**  
HERSTELLER  
GARANTIE  
[steinel.de/garantie](http://steinel.de/garantie)



2 - 2000 lux



IP44



ideal 2 m



max. 10 m



90° vertical



infrared sensor 180°



energy saving



8 sec - 35 min

# max.60w

max. 60 W E27



UV-protected material

## Technical specifications L 15 White

<b>European Article Number (EAN)</b>	4007841617912
<b>Dimensions(w x h x d):</b>	410 x 190 x 240 mm
<b>Voltage</b>	230-240 V/50 Hz
<b>Sensor type</b>	Passive infrared
<b>Output</b>	60 W max. / E 27
<b>Detection angle</b>	180°
<b>Tilting range</b>	90 °
<b>Capability of masking out individual segments</b>	Yes
<b>Reach</b>	10 m max.
<b>Time setting</b>	8 sec. - 35 min.
<b>Response brightness</b>	2-2000 lx
<b>Degree of protection (IP)</b>	IP44
<b>Protection class</b>	II
<b>Impact strength</b>	None
<b>Material</b>	UV-resistant plastic
<b>With lamp</b>	No
<b>Version</b>	White

## Application

Fronts of buildings and entrances