

TIJERA THERMO (MEISTERHOLZ SCHEREN THERMO)

1,22

U_d VALUE
(W/m² * K)



160 kg
MAXIMUM LOAD



26 mm
HATCH THICKNESS



x1
SEAL



10x
STEPS FLEX



3
YEARS GUARANTEE



The mark of responsible forestry



COMPLIANCE WITH THE STANDARD

TIJERA THERMO (MEISTERHOLZ SCHEREN THERMO)

The TIJERA THERMO loft ladder has got single sealing and hatch thickness 26mm. TIJERA THERMO model is ideally suited to conditions where the attic is insulated and does not require additional thermal insulation. The TIJERA THERMO stair model, thanks to the solid metal extendable „scissor” ladder, is perfect for installation in rooms up to 290 cm high. The excellent quality of materials used for the production of stairs and attention to every details of finish cause that the stairs will satisfy even the most demanding customers. The maximum load during use is up to 160 kg.

Technical specification

INSULATED HATCH THICKNESS	26 mm
THICKNESS OF THERMAL INSULATION	20 mm
HATCH COLOUR FROM BOTH SIDES	WHITE
WOODEN LADDER	10 STEPS
HEIGHT OF WOODEN BOX	135 mm
WIDTH OF LADDER	390 mm
WIDTH OF STEP	345 mm
DEPTH OF STEP	80 mm
LANDING SPACE	195/200/210 cm
OPENING DISTANCE/ANGLE	220/225/230/245 cm
MAXIMUM CEILING HEIGHT	290 cm

Box dimensions [cm]

OUTER BOX DIMENSIONS, MOUNTING OPENING 2 CM LARGER


120 x 60	130 x 60
120 x 70	130 x 60

Non-Standard dimensions

Min - Max Length	70 - 130 cm
Min - Max Width	60 - 75 cm

*Unusual dimensions available in full size of untypical stairs can not exceed 1 m²

Technical Draw

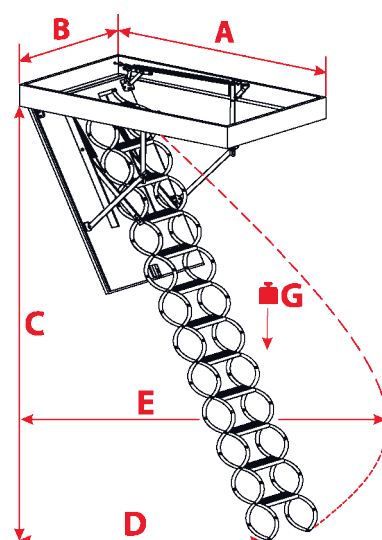

C	290 cm
G	160 kg

A	70	80-100	110	120-130
D	200 cm	210 cm	195 cm	195 cm
E	220 cm	245 cm	225 cm	230 cm

Accessories



MASKING BATTEN



MOUNTING SYSTEM



HATCH BALUSTRADE