SPECIFICATION

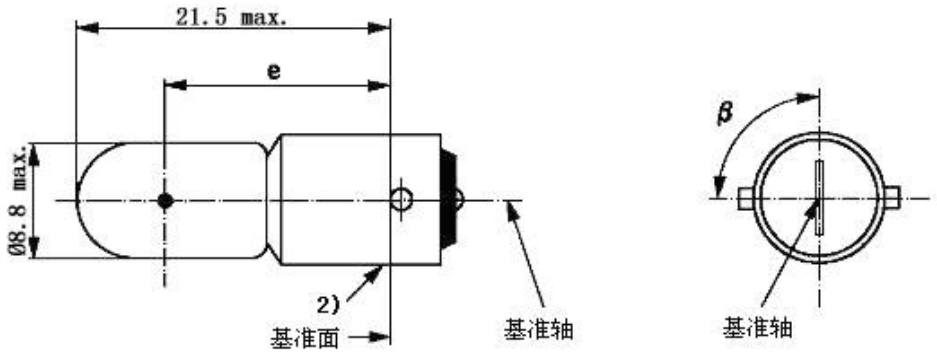

part no	filament	glass shell	base	length (mm)	light center (mm)	filament shape
T4W	12V4W	T-8	BA9s	21.5max	13.5～16.5	

specification						life		
test voltage (V)	current (mA)	power (W)	luminous (lm)	light center (mm)	luminous efficiency (lm/W)	life (h)	real voltage (V)	real life (h)
13.5	0.326 max	4.4 max	35±20%	13.5～16.5		750		