


Domestic users / Lights & Floodlights / Outdoor Lights / L 15

L 15

Information copy

The good old days. Classic outdoor SensorLight L 15, ideal for building fronts and entrances, 180° angle of coverage, reach up to 10 m, selectable time and twilight threshold, sensor tilts through 90° for exact adjustment of the detection zone.

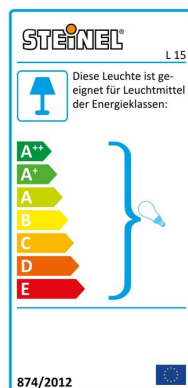

Details

3 JAHRE
HERSTELLER
GARANTIE
steinel.de/garantie



manufacturer warranty steinel.de/garantie

2 - 2000 lux

IP44

ideal 2 m

max. 10 m



90° vertical



infrared sensor 180°



energy saving



8 sec - 35 min

max.60w

max. 60 W E27



UV-protected material

Technical specifications L 15 Black

European Article Number (EAN)	4007841617813
Dimensions(w x h x d):	410 x 190 x 240 mm
Voltage	230-240 V/50 Hz
Sensor type	Passive infrared
Output	60 W max. / E 27
Detection angle	180°
Tilting range	90 °
Capability of masking out individual segments	Yes
Reach	10 m max.
Time setting	8 sec. - 35 min.
Response brightness	2-2000 lx
Degree of protection (IP)	IP44
Protection class	II
Impact strength	None
Material	UV-resistant plastic
With lamp	No
Version	Black

Application

Fronts of buildings and entrances