

# MINI EXCAVATOR

## EXC1400



### LOGISTICAL DATA

Weight net / gross	1010 / 1117 kg
Packaging dimensions	Packing unit 1: 2140 x 750 x 2300 mm Packing unit 2: 1110 x 740 x 1270 mm
Item number	5915003903
EAN	4046664294573
20 containers	tba
40 containers	tba
40 HQ containers	15 pcs.

### PRODUCT DATA

Dimensions L x W x H (w/o. roof)	2,925 x 720 – 900 x 2,140 mm
Engine	4-stroke petrol engine
Power	420 cm <sup>3</sup> / 11.5 PS / 8.5 kW
Fuel type	Petrol / 6L
Hydraulic system	Pump 2 x 13L/min / Tank 13.5 L
Additional control circuit	Yes
Maximum digging depth	1760 mm
Maximum reach	2925 mm
Max. ejection height	3055 mm
Maximum loading height	2115 mm

### PRODUCT DATA

Bucket width	350 mm
Bucket volume	0.022 m <sup>3</sup>
Bucket digging force	13.2 kN (1346 kg)
Arm digging force	5.7 kN (581 kg)
Track width	720 - 900 mm
Chain width	180 mm
Swing range of boom	left 45°, right 85°
Driving speed	1.8 km/h
Rotation range/speed	360° / 8.8 rpm
Climbing ability	15°
Ground pressure	29 kPa (0.295 kg/cm <sup>2</sup> )
E-start	Yes
LED	Yes
CO <sub>2</sub> emissions	734.5 g/kWh



Swivel range: boom to the left 45°, to the right 85°.



Large, lowerable dozer blade that can be adjusted to the track width for supporting the boom or moving earth.



Equipped as standard with a 350 mm wide bucket with a capacity of 0.022 m<sup>3</sup>.




Easy replacement of attachments thanks to the quick-change system.



Loading height: max. 2115 mm / Discharge height: max. 3055 mm / Digging depth: max. 1760 mm / Reach: max. 2925 mm.



Extendable chassis from 720 to 900 mm for flexible adjustment to narrow spaces or stable positioning during excavator operation.

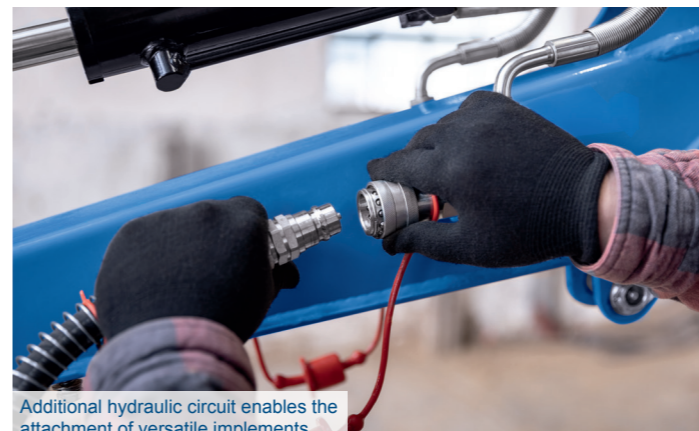

Additional hydraulic circuit enables the attachment of versatile implements.

4-stroke petrol engine  
420 cm<sup>3</sup> / 11.5 hp /  
8.5 kW



Additional hydraulic  
circuit



720 - 900 mm




max. 15°



350 mm



left 45°, right 85°



**+** INCLUDING

- Bucket

**schepach**  
Germany