


Paris

važi od / valid from

09.03.2026


Građevinska dimenzija stepenica basic size	mm	1400 x 1450
Minimalni otvor u stropu minimum opening size	mm	1500 x 1500
Vanjski radijus outside radius	mm	700
Maksimalna visina pod - gotov pod max. floor height	mm	2820
Maksimalna visina etaže sa produžetkom / dodatnim gazištem max floor height with 1 height extension	mm	3055
Maksimalna visina etaže sa dva produžetka / dodatna gazišta max floor height with 2 height extensions	mm	3290
Dubina gazišta tread depth	mm	172
Visina gazišta rise	mm	190-235
Slobodni prolaz na stepenicama free passage width	mm	600
Visina ograde railing height	mm	1000
Kut gazišta rotation per step	°	21
Kut podesta rotation of the platform	°	50
Promjer središnjeg stupa spindle diameter	mm	108
Debljina gazišta tread thickness	mm	35
Promjer šipke ograde railing rod diameter	mm	22
Promjer rukohvata handrail diameter	mm	40

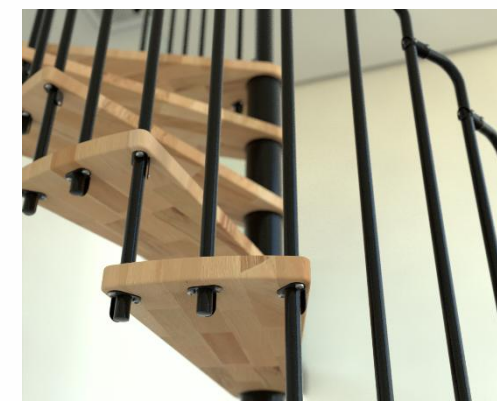


Gazišta steps	Lakirana bukva beech lacquered
Nosivi stup spindle tube	Željezo praškasto lakirano u sivu, crnu ili bijelu boju Steel powdercoated in grey, black or white
Šipke ograde balusters	Željezo praškasto lakirano u sivu, crnu ili bijelu boju Steel powdercoated in grey, black or white
Broj gazišta number of steps	11 + 1 podest 11 + 1 platform

Varijante montaže / Assembling options

10 gazišta (standard-2)
10 steps (standard-2)

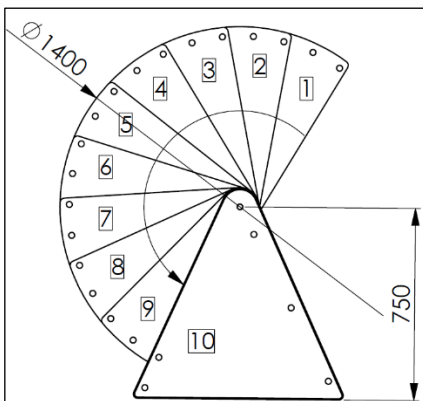

11 gazišta (standard-1)
11 steps (standard-1)

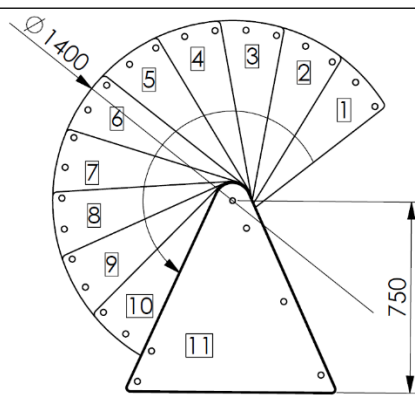

12 gazišta (standard)
12 steps (standard)

