


5000 W DIESEL POWER GENERATOR

SG5200D



Integrated voltage meter, oil level warning (protects the motor from running dry) and overload protection (ensures the safety of the device).

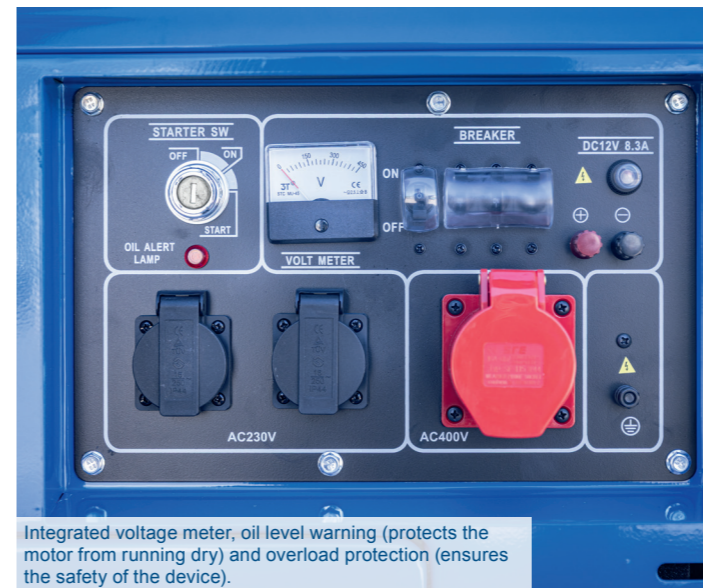

Two 230-volt sockets and a 12-volt connection enable flexible operation of various electrical consumers.




Integrated electric start with ignition lock for convenient and safe starting of the unit.



1 x 400 volt connection, rated power 4200 watts. Max. power 5000 watts.

PRODUCT DATA	
Dimensions L x W x H	930 x 515 x 710 mm
Engine	Single cylinder, 4-stroke diesel motor
Power	7.9 hp
Fuel type	Diesel
Voltage regulation	AVR system
Rated voltage	230 V / 400 V
Rated/Max. / Peak Power	3000 W (230 V~) / 4200 W (400 V~) / 5000 W (400 V~)
sockets	2 x 230 V~ / 1 x 400 V
Starter type	Electric start
Parallel circuit	No
Overload protection	Yes
Oil monitor	Yes
Sound pressure level (LwA)	97dB(A)
CO ² output	958.901 g/kWh

LOGISTICAL DATA	
Weight net / gross	160 / 165 kg
Packaging dimensions	940 x 550 x 800 mm
Item number	5906241901
EAN	4046664300953
20 containers	72 pcs.
40 containers	144 pcs.
40 HQ containers	144 pcs.

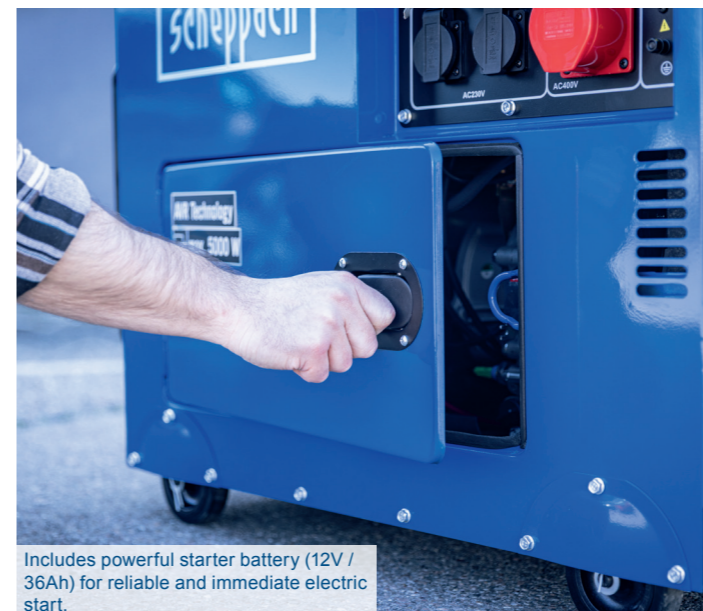


Includes powerful starter battery (12V / 36Ah) for reliable and immediate electric start.



Copper winding of the coil ensures a long service life, high efficiency and improved electrical conductivity.

1 x 12 V connection



2 x 230 V~ sockets
1 x 400 V~ power outlet



Oil warning indicator



Robust



Overload protection



Fuel-saving



Power pack



Elektro Start



schenppach
Germany