


## TECHNICAL DATA SHEET

### Product Information

|              |                                |
|--------------|--------------------------------|
| Dimensions   | 240x1295mm                     |
| Thickness    | 7.5mm(6.0mm SPC+ 1.5mm IXPE)   |
| Wearlayer    | 0.55mm                         |
| Click System | Valinge 5G                     |
| Weight       | appr. 12.4 kg / m <sup>2</sup> |

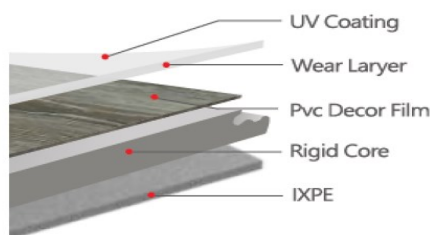

### Technical Information

|  | Property                                                     | Test Method Standard | Review in accordance with Standard             |
|--|--------------------------------------------------------------|----------------------|------------------------------------------------|
|  | Class 33<br>Moderate used commercial areas                   | EN ISO 10874         | For public and commercial areas with heavy use |
|  | Dimensional stability after exposure to heat                 | EN ISO 23999 : 2008  | <0,15%                                         |
|  | Light stability                                              | EN ISO 105-B02       | ≥ Grade 6                                      |
|  | Effect of Simulated Movement of Furniture Leg                | EN 424:2001          | No visible damage                              |
|  | Reaction to fire                                             | EN 13501-1           | Bfl - s1                                       |
|  | Slip resistance                                              | EN 13893             | DS                                             |
|  | Slip resistance                                              | DIN 51130            | R9                                             |
|  | Residual indentation                                         | EN ISO 24343-1       | <0,1mm                                         |
|  | Determination of resistance to stains<br>chemical resistance | EN ISO 26987         | Not affected                                   |
|  | Thermal conductivity&Thermal resistance                      | EN 12667             | 0.122 W/(m·K)<br>0.057 (m <sup>2</sup> .K)/W   |
|  | Electrical propensity                                        | EN 1815              | <2 kv                                          |
|  | Formaldehyde emission                                        | EN 717-1             | Class E1                                       |
|  | Acoustic Insulation                                          | EN ISO 10140-3       | 17 dB                                          |
|  | VOC                                                          | EN 16561             | A+                                             |
|  | Suitable for Underfloor Heating                              | EN 12524             | Yes, max. floor temperature 27 ° C             |
|  | Utilization                                                  |                      | Recyclable                                     |

Notes:

\* Technical changes reserved by Kingdomfloors.