


## ECO LED BAJO MUEBLE


### Características de Producto

- Ideal para bajo, dentro y encima de estanterías de cocina, libros, vitrinas, caravanas y casas móviles
- Directamente interconectables
- Vida útil de 20,000 horas
- Cuerpo de plástico y difusor de PC
- Acabado blanco
- Se incluye cable con clavija para conexión a la red
- Cable de alimentación de 1,5m, cable de interconexión de 15cm

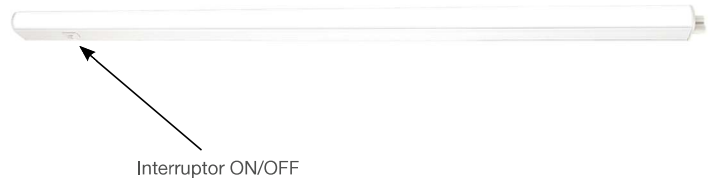

CAT NO.	DRIVER	LÚMENES LUMINARIA	POTENCIA	EFICACIA Llm/cW	PESO (kg)	CRI	RANGO TEMP (°C)	L/B VIDA ÚTIL
ELUCB3W4S40	Estándar	400	4W	91	0,10	>80	-25° to +40°	L70 / B50
ELUCB6W8S40	Estándar	800	8W	91	0,20	>80	-25° to +40°	L70 / B50
ELUCB9W10S40	Estándar	1000	10W	91	0,30	>80	-25° to +40°	L70 / B50
ELUCB12W14S40	Estándar	1400	14W	91	0,40	>80	-25° to +40°	L70 / B50

### Dimensiones

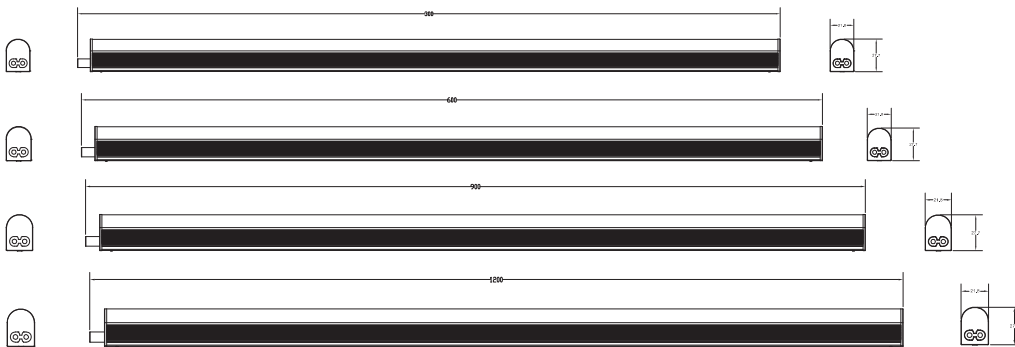

STANDARD	DESCRIPTION
EN 60598-1	Luminaires – General requirements
EN 60598-2-1	Luminaires – Fixed general purpose
EN 61000-3-2	Electromagnetic compatibility (EMC) – Part 3-2: Limits - for harmonic current emissions
EN 61000-3-3	Limits - Limitation of voltage changes, voltage fluctuations and flicker in public low-voltage supply systems, for equipment with rated current ≤ 16 A per phase and not subject to conditional connection
EN 61547	Equipment for general lighting purposes – EMC immunity requirements
EN 55015	Limits and methods of measurement of radio disturbance characteristics of electrical lighting and similar equipment

