


Domestic users / Lights & Floodlights / Outdoor Lights / L 20

L 20

Information copy

Ambience lighting squared. Designer sensor-switched outdoor light L 20, ideal for building entrances and building fronts, 180° angle of coverage, reach up to 10 m, selectable time and twilight threshold, sensor tilts through 90° for exact adjustment of the detection zone, stainless-steel trim panel.

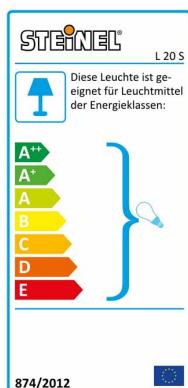

Details

3 JAHRE
HERSTELLER
GARANTIE
steinel.de/garantie

manufacturer warranty steinel.de/garantie



2 - 2000 lux



IP44



ideal 2 m



max. 10 m



shock proof IK07



90° vertical



infrared sensor 180°




energy saving



8 sec - 35 min

max.60w

max. 60 W E27



Impact-resistant material rated to IK 07



high quality inox material

Technical specifications L 20

European Article Number (EAN)	4007841566814
Dimensions(w x h x d):	230 x 240 x 80 mm
Voltage	230-240 V/50 Hz
Sensor type	Passive infrared
Output	60 W max. / E 27
Detection angle	180°
Tilting range	90 °
Capability of masking out individual segments	Yes
Reach	10 m max.
Time setting	8 sec. - 35 min.
Response brightness	2-2000 lx
Degree of protection (IP)	IP44
Protection class	II
Impact strength	IK07
Material	Plastic with stainless-steel trim panel
With lamp	No

Application

ideal for building entrances and fronts of buildings