


Domestic users / Lights & Floodlights / Outdoor Lights / L 585 S

## L 585 S

### Information copy

Individualist all round. Outdoor SensorLight L 585 S, ideal for building fronts and entrances, 180° angle of coverage, reach up to 12 m, selectable time and twilight threshold, sensor tilts through 70° for exact adjustment of the detection zone.

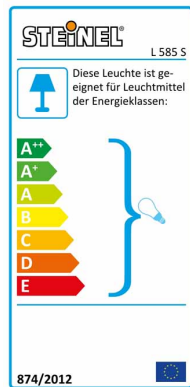

### Details

**3 JAHRE**  
HERSTELLER  
GARANTIE  
steinel.de/garantie



2 - 2000 lux



IP44



ideal 2 m



max. 12 m



70° vertical



infrared sensor 180°



energy saving



8 sec - 35 min

# max.60w

max. 60 W E27



UV-protected material

## Technical specifications L 585 S Black

European Article Number (EAN)	4007841005535
Dimensions(w x h x d):	307 x 215 x 228 mm
Voltage	230-240 V/50 Hz
Sensor type	Passive infrared
Output	60 W max. / E27  100 W max. / E 27
Detection angle	180° with sneak-by guard
Tilting range	70 °
Capability of masking out individual segments	Yes
Reach	12 m max.
Time setting	8 sec. - 35 min.
Response brightness	2-2000 lx
Degree of protection (IP)	IP44
Protection class	II
Impact strength	None
Material	UV-resistant plastic
With lamp	No
Version	Black

## Application

Fronts of buildings and entrances