


# ONDULINE® RIDGE A100 INTENSE

## Product characteristics

Length	L	100 cm
Height of corrugation	H	32 mm
Width at 0°	w	47 cm
Flattened width	Fw	50 cm
Thickness	t	2,9 mm
Surface		0,47 m <sup>2</sup>
Weight		1,27 kg
Weight per m <sup>2</sup>		2,7 kg/m <sup>2</sup>

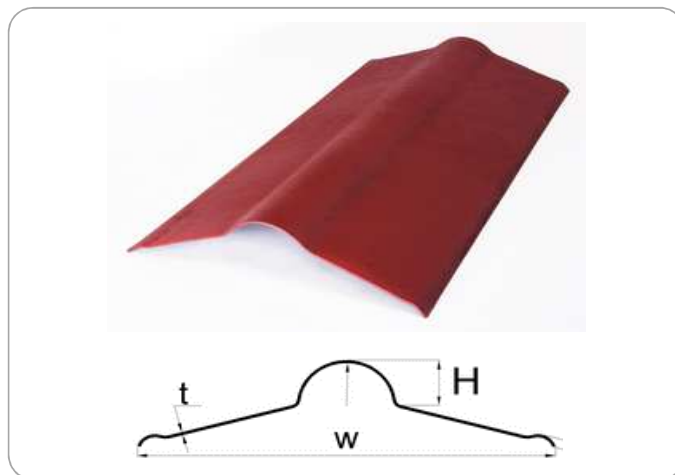

## General information

### ► Application field

Lightweight ridge designed for corrugated roofing sheets.

### ► Material description

Bitumen material reinforced with cellulosic fibers and thermosetting resin and protected against weathering by a specific water-base varnish film.

### ► Color range:

Intense black      Intense red  
Intense brown      Intense green

### ► Installation

Special conditions of installation are required. Refer to the installation guide.

### ► Tariff custom code

HS: 68079000

## Technical data

### ► Mechanical & physical properties

Tearing strength	< 150 N
Water impermeability	Pass <sup>1</sup>
Proportion of bitumen	> 40%
Homogeneity	Pass <sup>2</sup>
Water absorption	< 20%

<sup>1</sup>No drop of water underneath sheet after 48 hours

<sup>2</sup>No area larger than 1 cm<sup>2</sup> without bitumen

### ► Durability

Water impermeability after ageing	Pass <sup>1</sup>
Tearing strength after ageing	< 150 N
Thermal coefficient	< 100.10-6 1/K

### ► Fire performance

Reaction to fire - EN 13501-1	E
-------------------------------	---