


ONDULINE® RIDGE A100 PLUS

Product characteristics

Length	L	100 cm
Width at 0°	w	50 cm
Flat width	Fw	3,0 mm
Height of accessory	H	32 mm
Thickness	t	3,0 mm
Surface		0,50 m ²
Weight		1,37 kg
Weight per m ²		2,7 kg/m ²

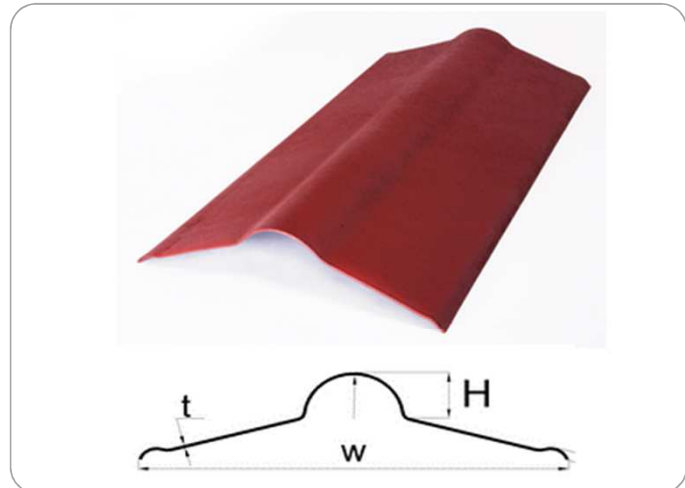

General information

► Application field

Lightweight bitumen accessory designed for all buildings covered with ONDULINE® roofing system to provide a weatherproof seal at the ridge.

► Material description

Bitumen material reinforced with cellulosic fibers and thermosetting resin and protected from the weather by a specific water-based paint film.

► Color range:

Silver grey	Bordeaux	Fiorentino
Ebony black	Slate grey	Cobalt blue
Hazel Brown	Classic red	
Terracotta	Forest green	

► Installation

Special conditions of installation are required. Refer to the installation guide.

► Tariff custom code

HS: 68079000

Technical data

► Mechanical & physical properties

Tearing strength	≥ 200 N
Water impermeability	Pass ¹
Proportion of bitumen	> 40%
Homogeneity	Pass ²
Water absorption	< 20%

¹No drop of water underneath sheet after 48 hours

²No area larger than 1 cm² without bitumen

► Durability

Water impermeability after ageing	Pass ¹
Tearing strength after ageing	≥ 200 N
Thermal coefficient	< 100.10-6 1/K

► Fire performance

Reaction to fire - EN 13501-1	E
-------------------------------	---