


DOMESTIC HOT WATER HEAT PUMP

WIFI USER MANUAL

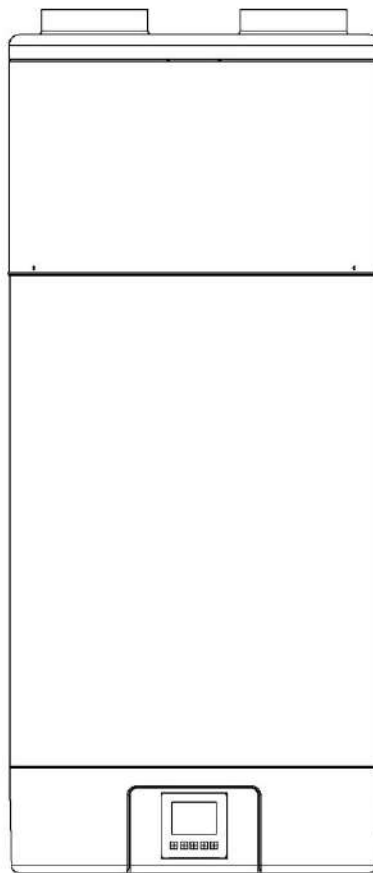

IMPORTANT NOTE:

Thank you very much for purchasing our product,
Before using your unit, please read this manual
carefully and keep it for future reference



WIFI User Manual


1. APP download

Go to APP store or Play store and search “Smart Life”, download and install the APP, then start it.




2. Register

- If you are new user, you will need registering: Register → Input your mobile phone number → Get verification code → Input the verification code → Set the password → Complete.

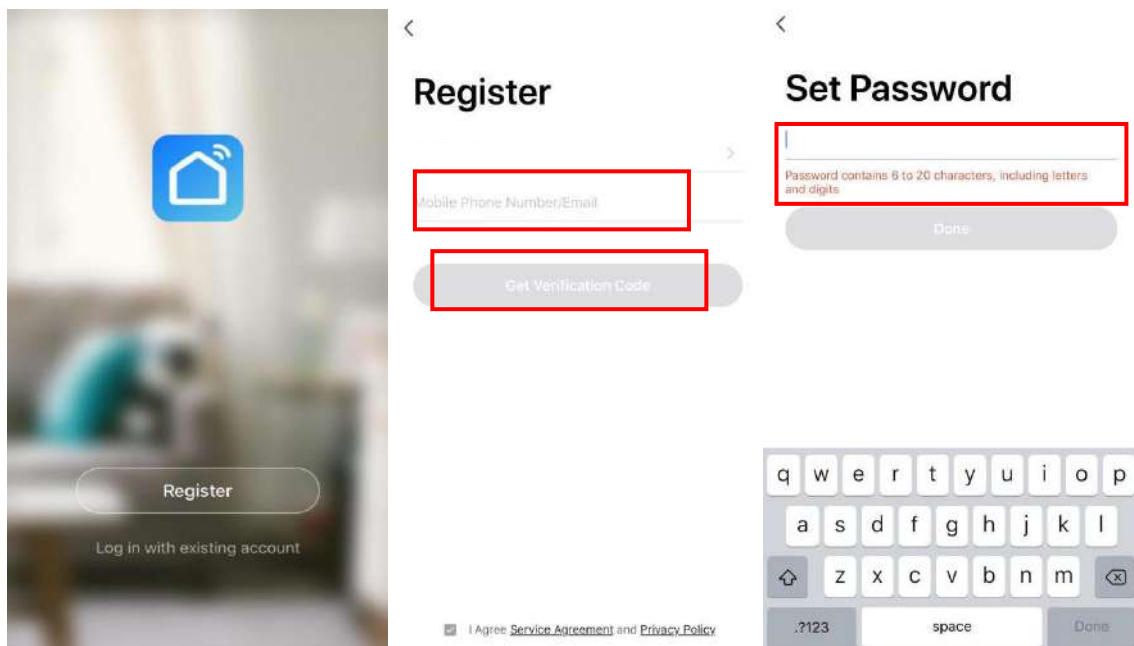


After registering, then create family: Create family → Input family name → Input family location → add room → complete;

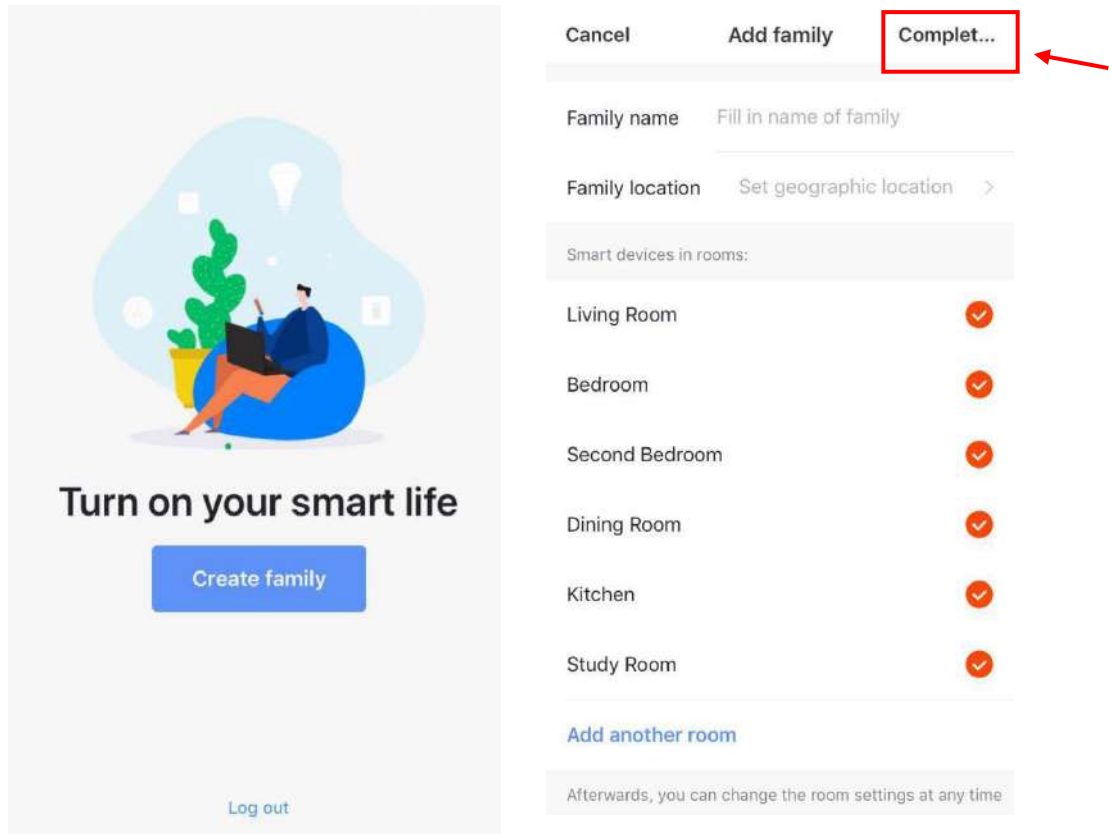


3. Login


1) Login with existing account.

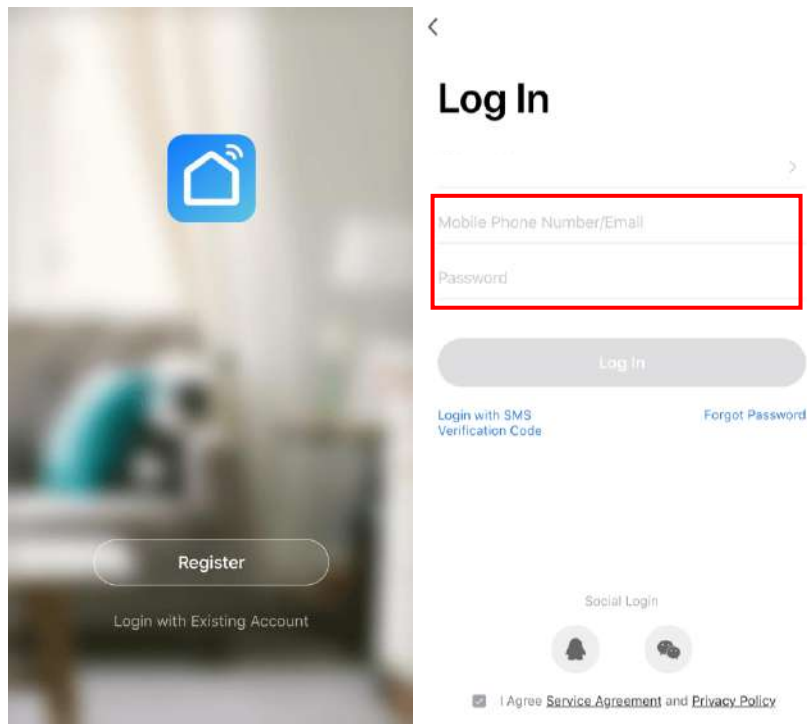

2) If you have forgotten your password, you can select the verification code to log in. Select “Login with SMS Verification Code”, input the mobile phone number, and click “Get Verification Code”, then input the verification code you got by SMS.

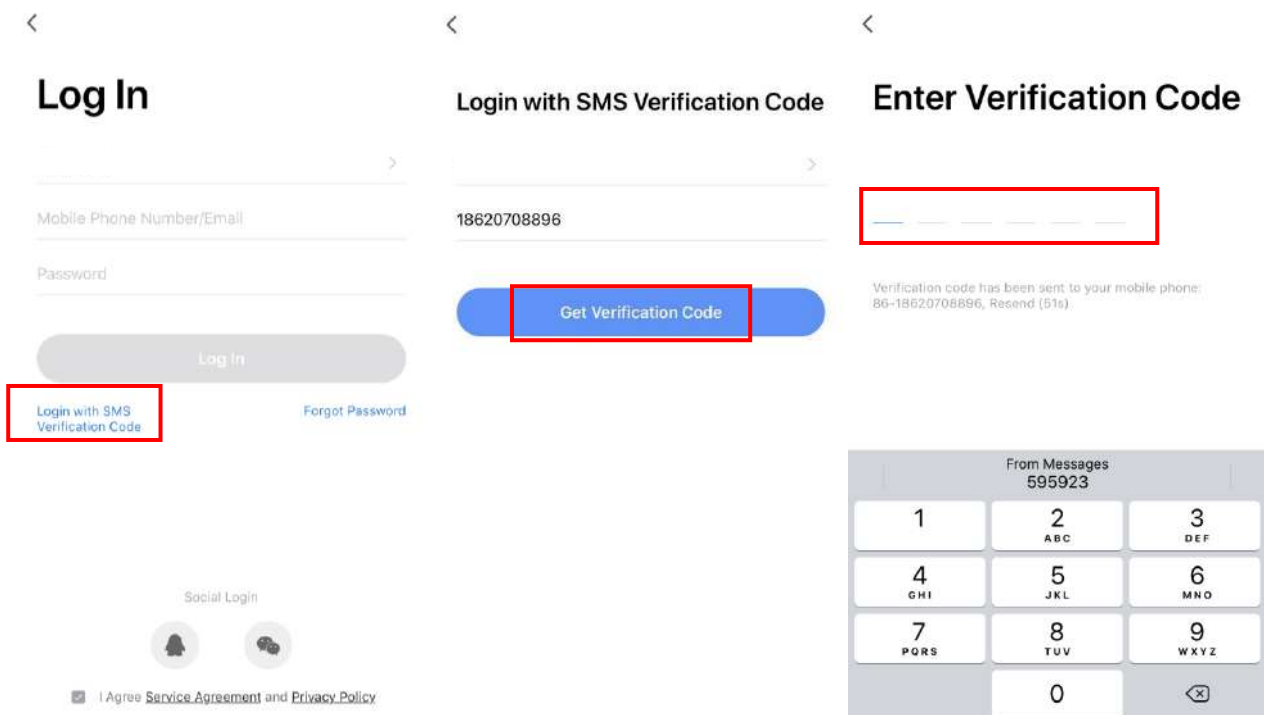

3) After creating a family or logging in, enter the Smart life app interface, can do family or room management as below pictures shown.

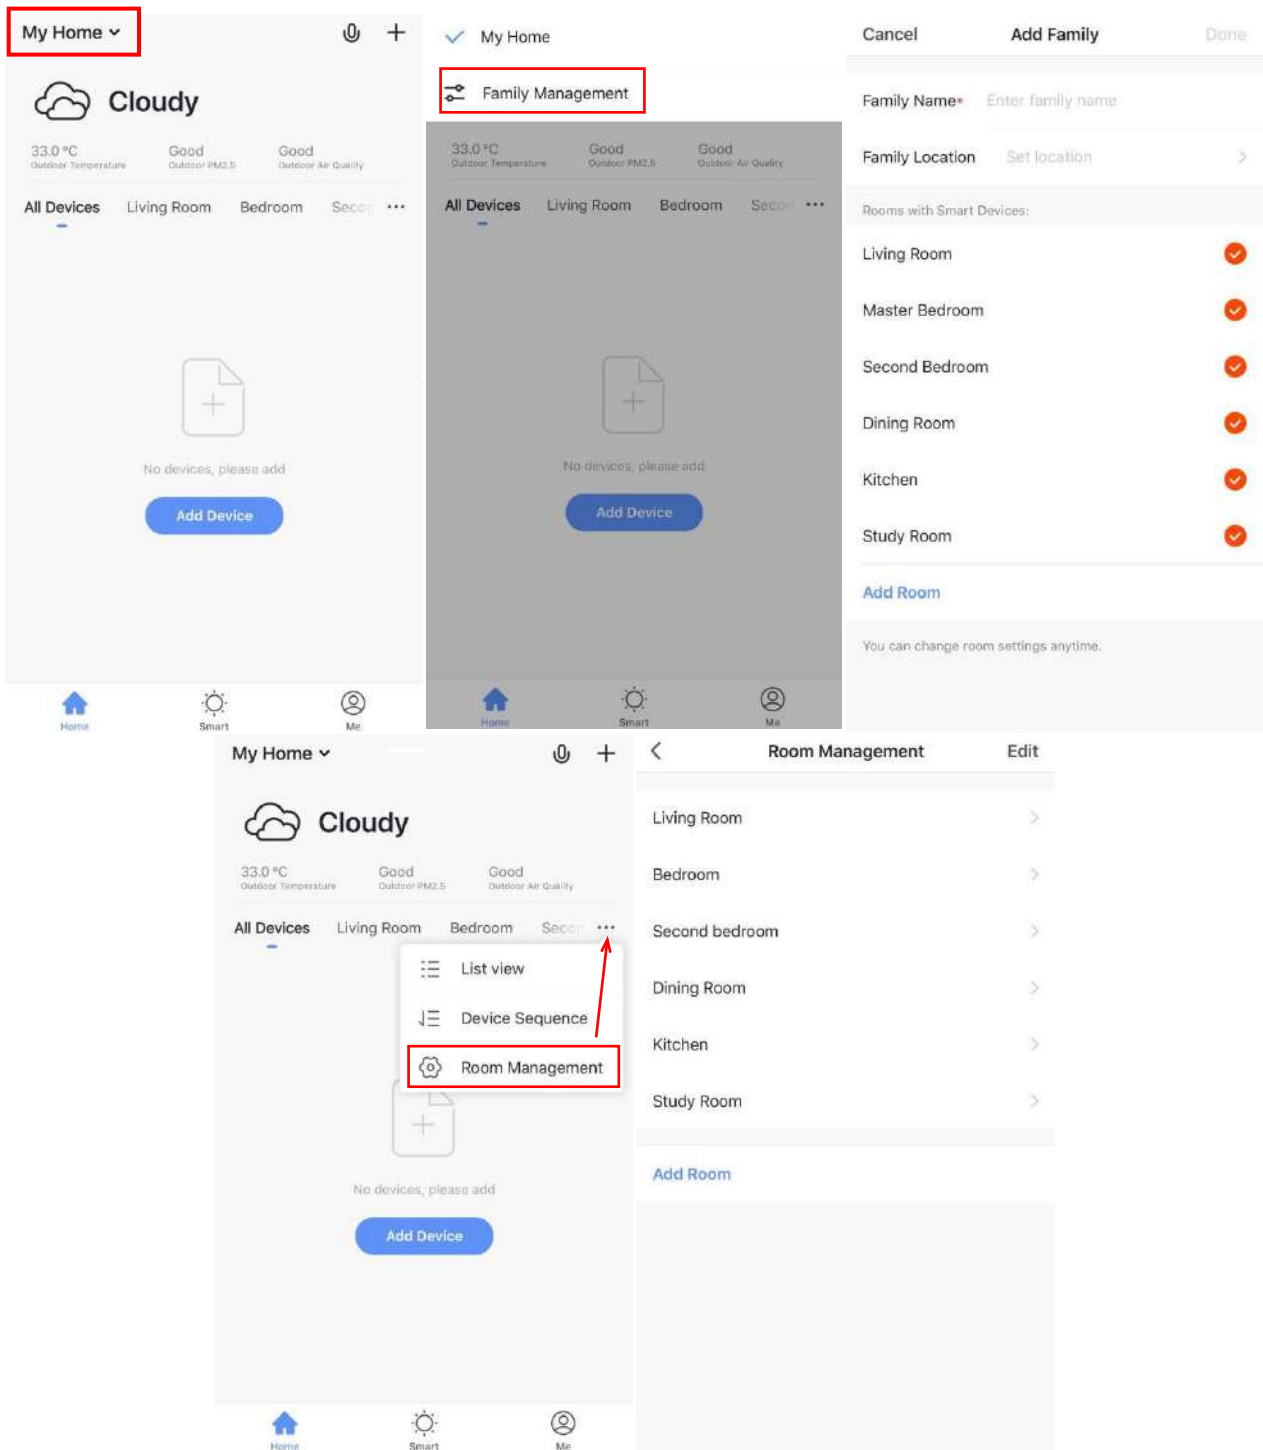

4. WIFI Module Configuration Step:

- Method 1 (Intelligent network connection mode):


- ◆ Step 1:

Manually enter the intelligent network connection mode: press button “▲”+“⏻” in the control panel 3 seconds, icon ■■■ will be in quick blinking, it enters intelligent distribution network mode.

If the WIFI module doesn't connect with the network , after 3 minutes, the icon “■■■” will stop blinking and not be displayed, and the intelligent network connection mode will exit. To re-enter the intelligent network connection mode, it need to press again the button “▲”+“⏻”for 3 seconds;



- ◆ Step 2:

Make your phone connect to WIFI at good network connection status.

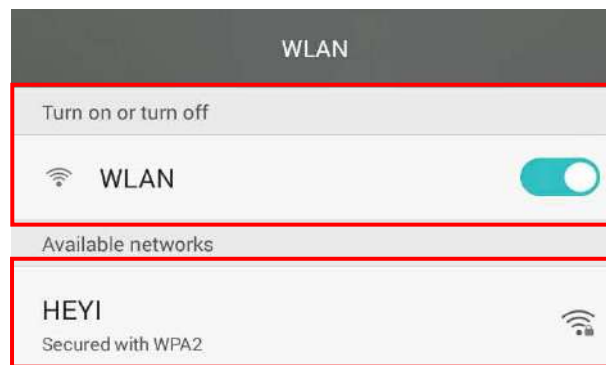



- ◆ Step 3:

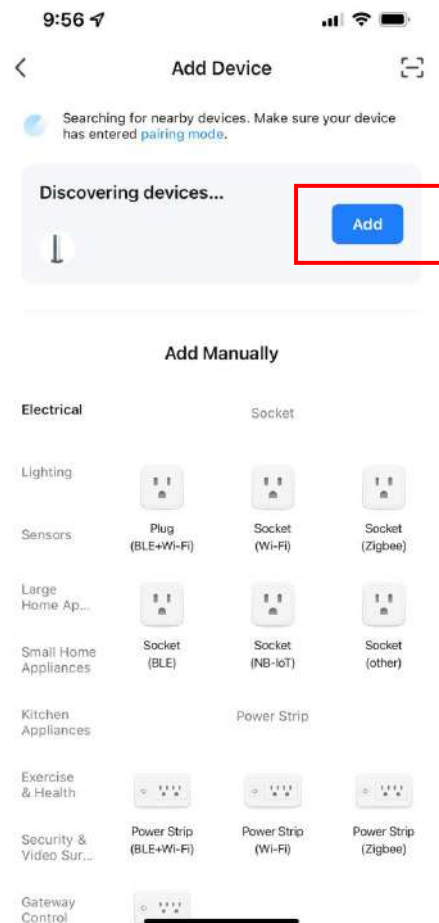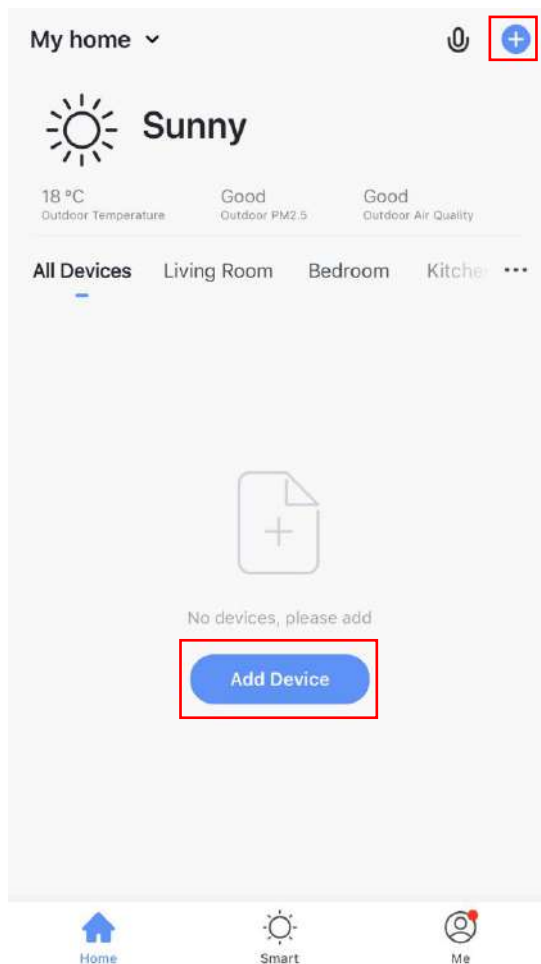
Open the “Smart Life” APP, enter into the main interface, click the button “+” in the top right corner or click the button “Add Device”.The software then automatically searches for nearby devices.



◆ **Step 4:**


After entering the “Add Device” interface, please confirm that the controller has selected the intelligent network connection mode and the icon “” is blinking quickly, then click “Confirm the indicator rapidly blink”;

Enter into the WIFI connection interface, input the password of WIFI connected in the phone. Click “OK”, then enter into the device connection status, and wait for the loading of 100%. **Note:** When the remote WIFI module is connected to a WIFI, the "" icon flashes slowly;

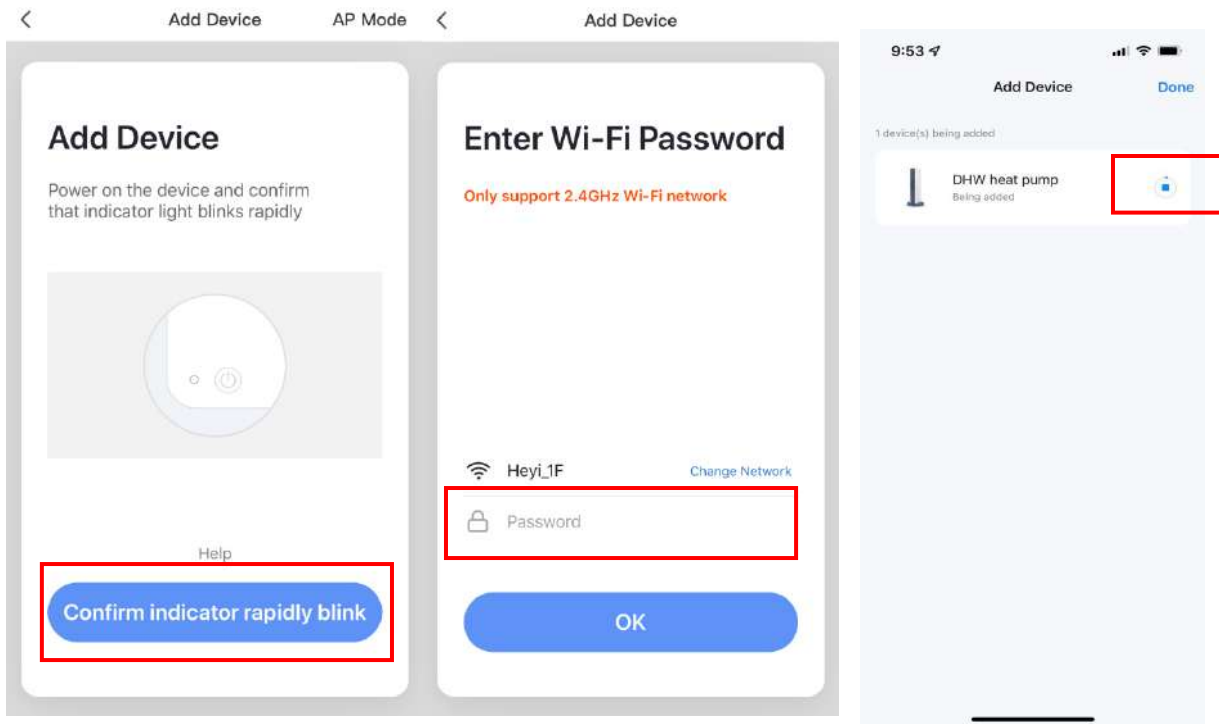



◆ **Step 5:**

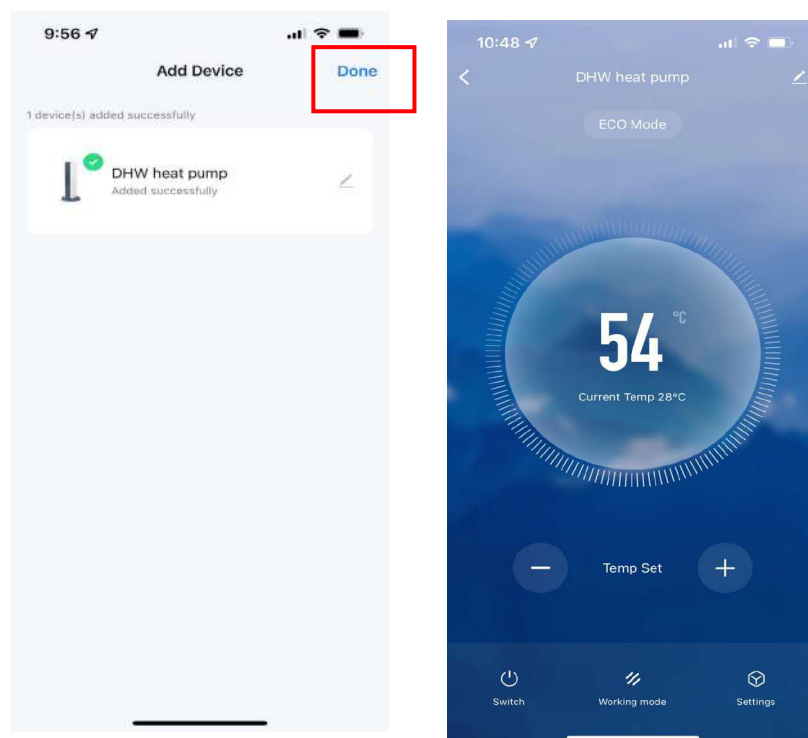

After the App successfully connect to the device, as below shown “Device added successfully”, you can change the the device name and set the installing location. Then click “Done”, it will enter into the device operation interface..



- **Method 2 (AP network connection mode) :**


- ◆ **Step 1**

Press “▼”+“ ” button in the control panel 3 seconds, icon  will be in slow blinking , it enters AP network connection mode.

If the WIFI module doesn't connect with the network , after 3 minutes, the icon “  ” will stop blinking and not be displayed, and the AP network connection mode will exit. To enter the AP network connection mode, it need to press again the button “▼”+ “  ” on the controller for 3 seconds.



- ◆ **Step 2:**

Make your phone connect to WIFI at good network connection status.

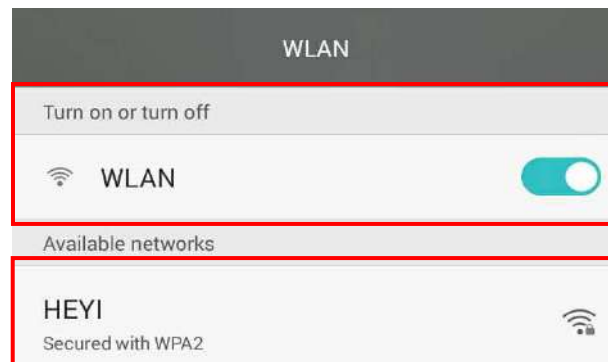


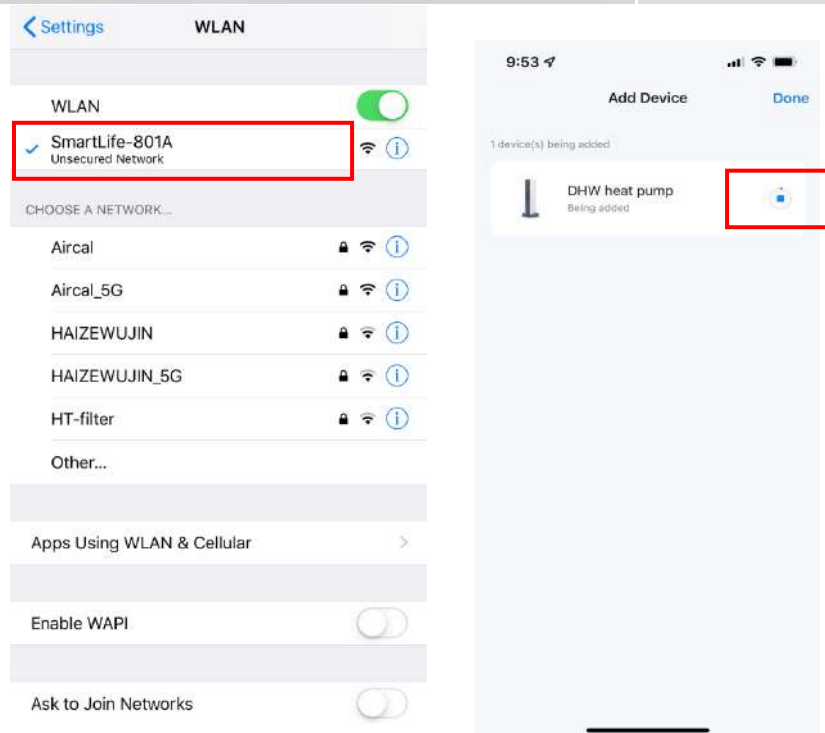
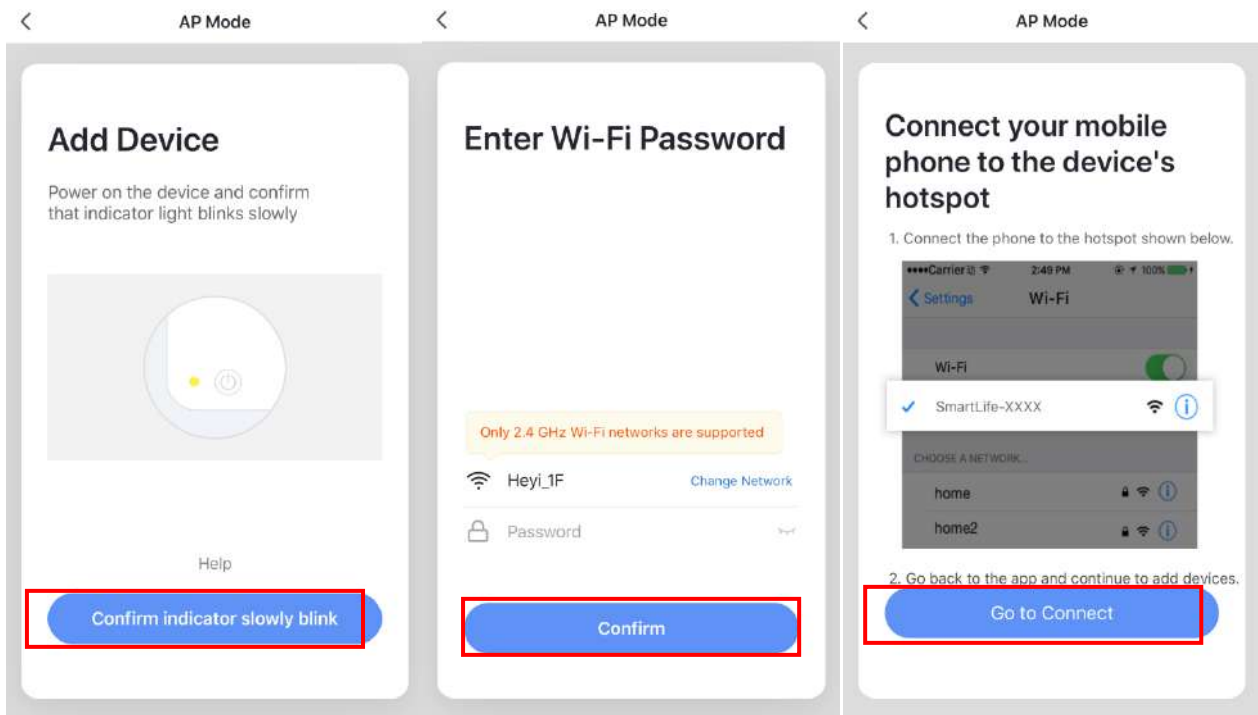
- ◆ **Step 3:**

Open the “Smart Life” APP, enter into the main interface, click the button “+” in the top right corner or click the button “Add Device”.The software then automatically searches for nearby devices.

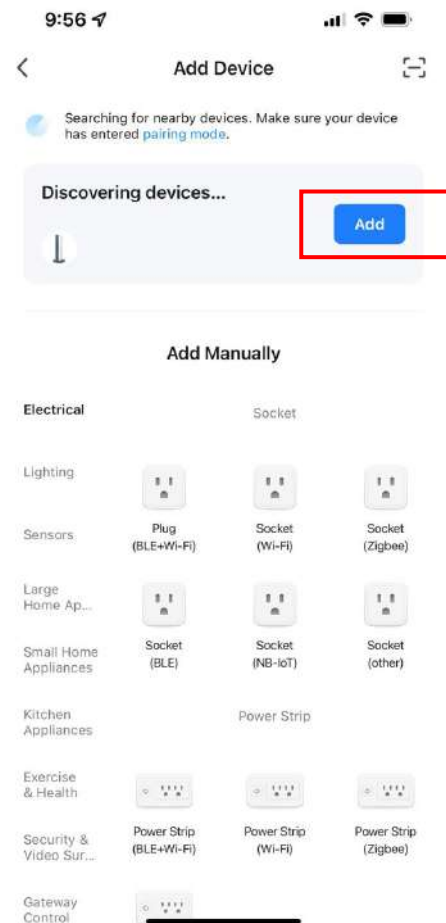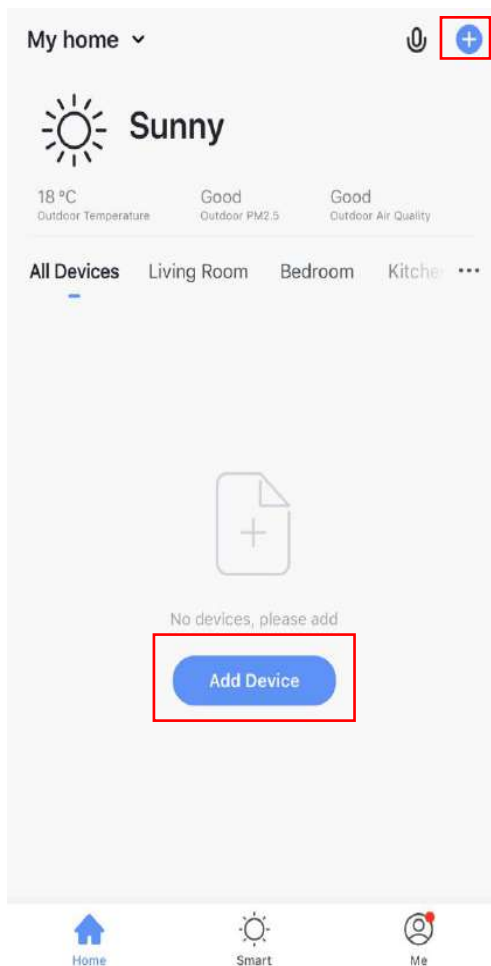


◆ **Step 4:**

Enter the interface of “Add device”, click “AP Mode” in the top right corner, it will enter interface of “Add Device” under AP mode. Confirm the controller to select the AP network connection mode (icon “” is in slow blinking), click “Confirm indicator slowly blink”. Then it will Pop up the WIFI connection interface, input the WIFI password which must be the same as the password of WIFI connected to the phone, click “confirm”, then it will pop up “connect your mobile phone to the device’s hot spot”, click “Go connect”. It will enter into the connection interface of phone WIFI, connect the “SmartLife-XXX”, as per picture shown: SmartLife-801A. After connected successfully, return “Smart Life” APP, the APP will enter into the device connection status automatically, it will complete until the loading up to100%.



◆ **Step 5:**


After the App successfully connect to the device, as below shown “Device added successfully”, you can change the the device name and set the installing location. Then click “Done”, it will enter into the device operation interface.

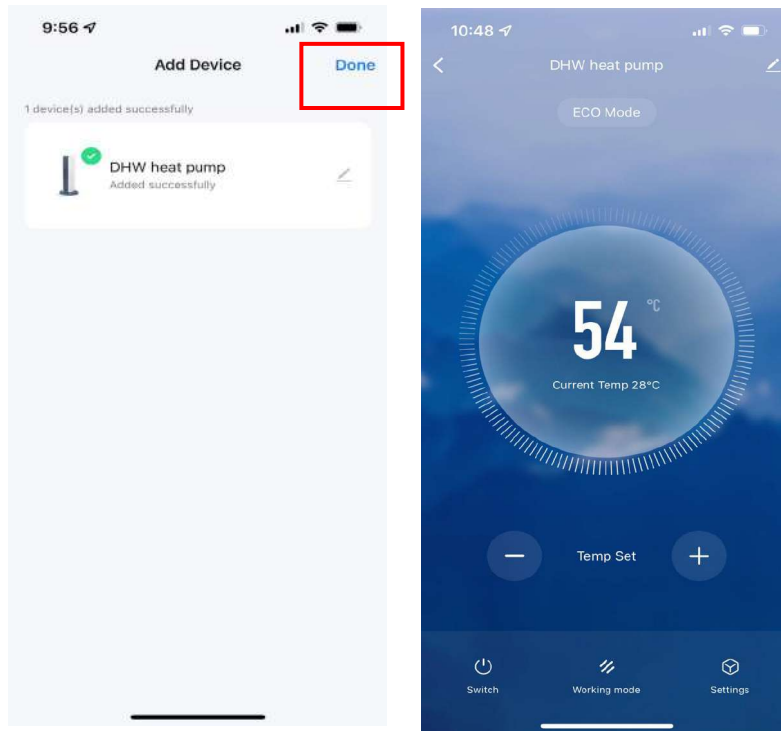

Note: If the connection fails, you can manually enter the AP network connection mode again, and reconnect according to the above steps.


5. APP Function Operation

After the device is successfully added, the user can enter into the device operation interface by going to the main interface and clicking the added device, then below functions can be operated.

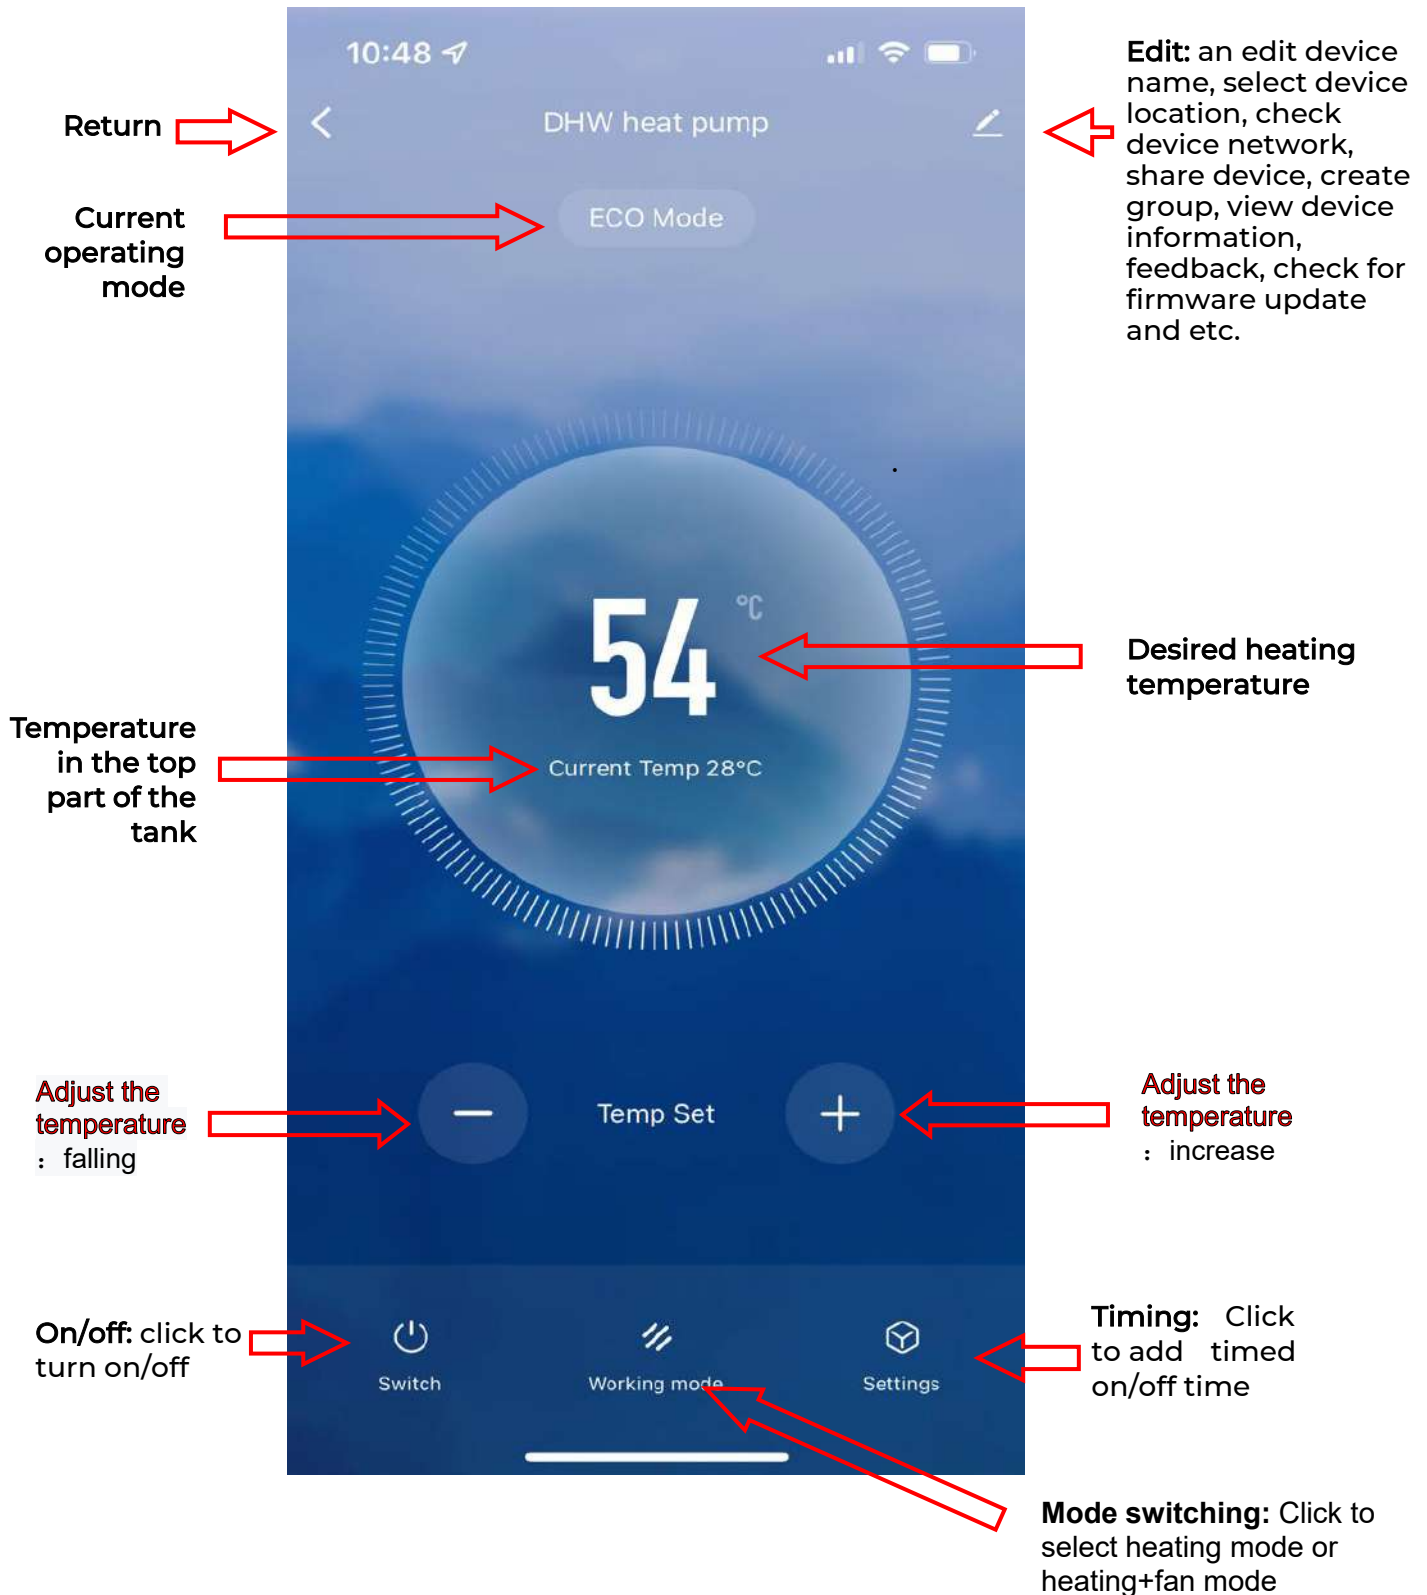


- **Modify the device name**

Click button  and click “Device Name”, can modify the device name.

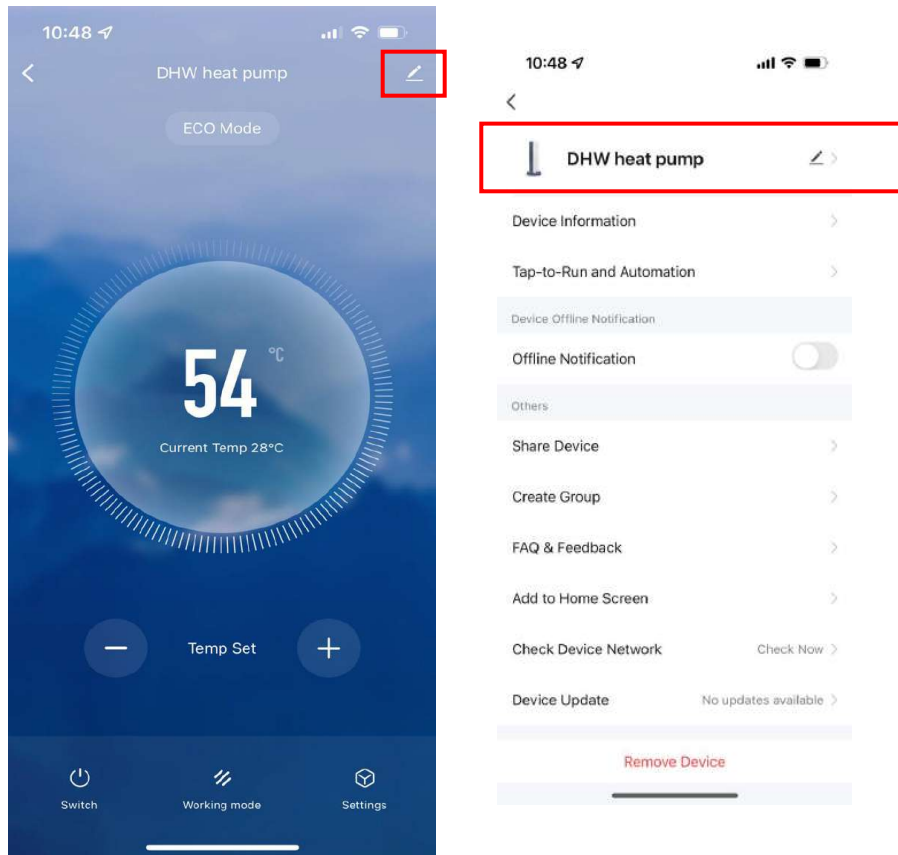


- **Share device**


1) Click button  and click “Share Device”, can share device to other users' account.

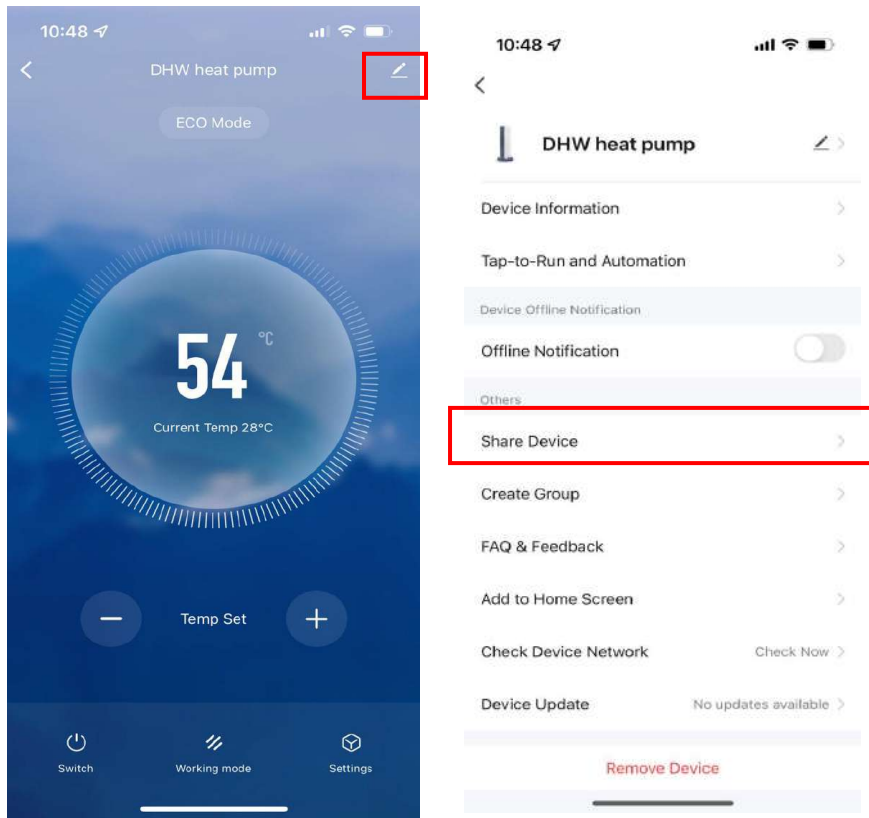


2) Click “Add Sharing” and input the shared account and click “Finish”. The sharing success list shows the newly added account.

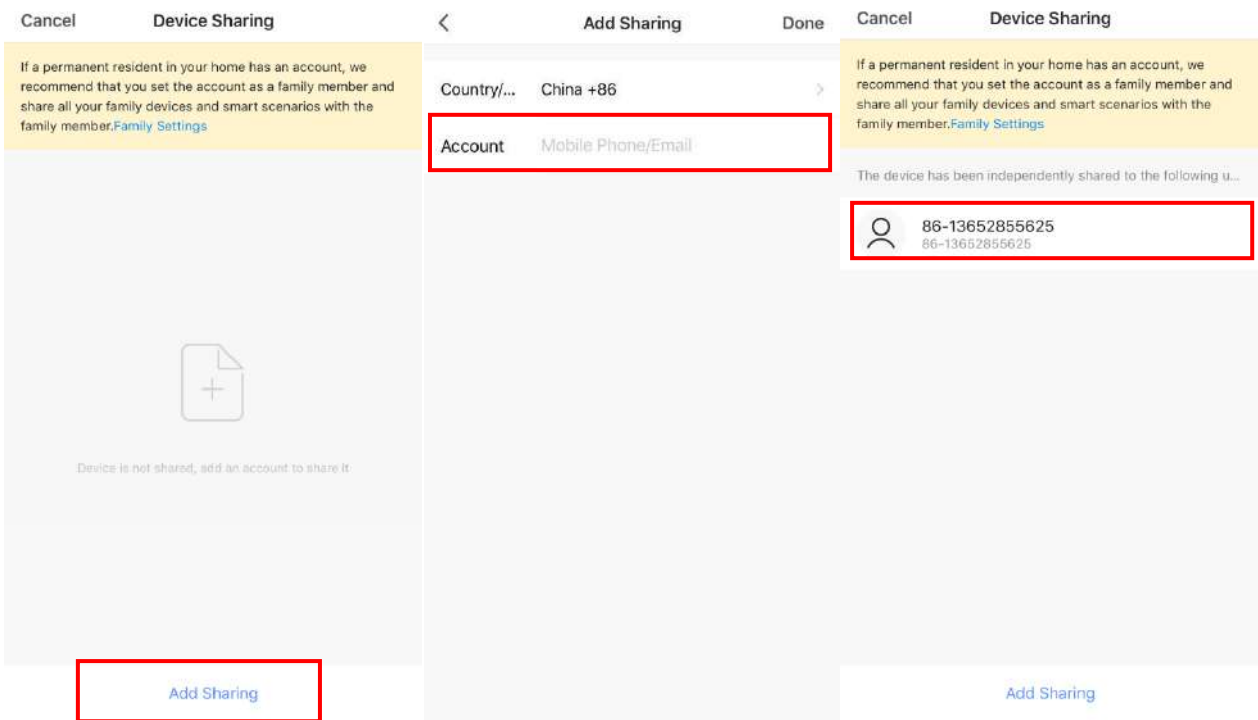


3) The shared account will receive the shared device shown as below, and he can operate the shared device.

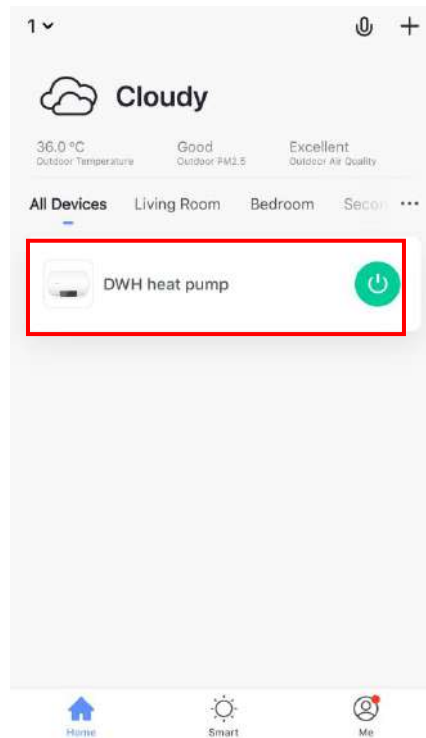


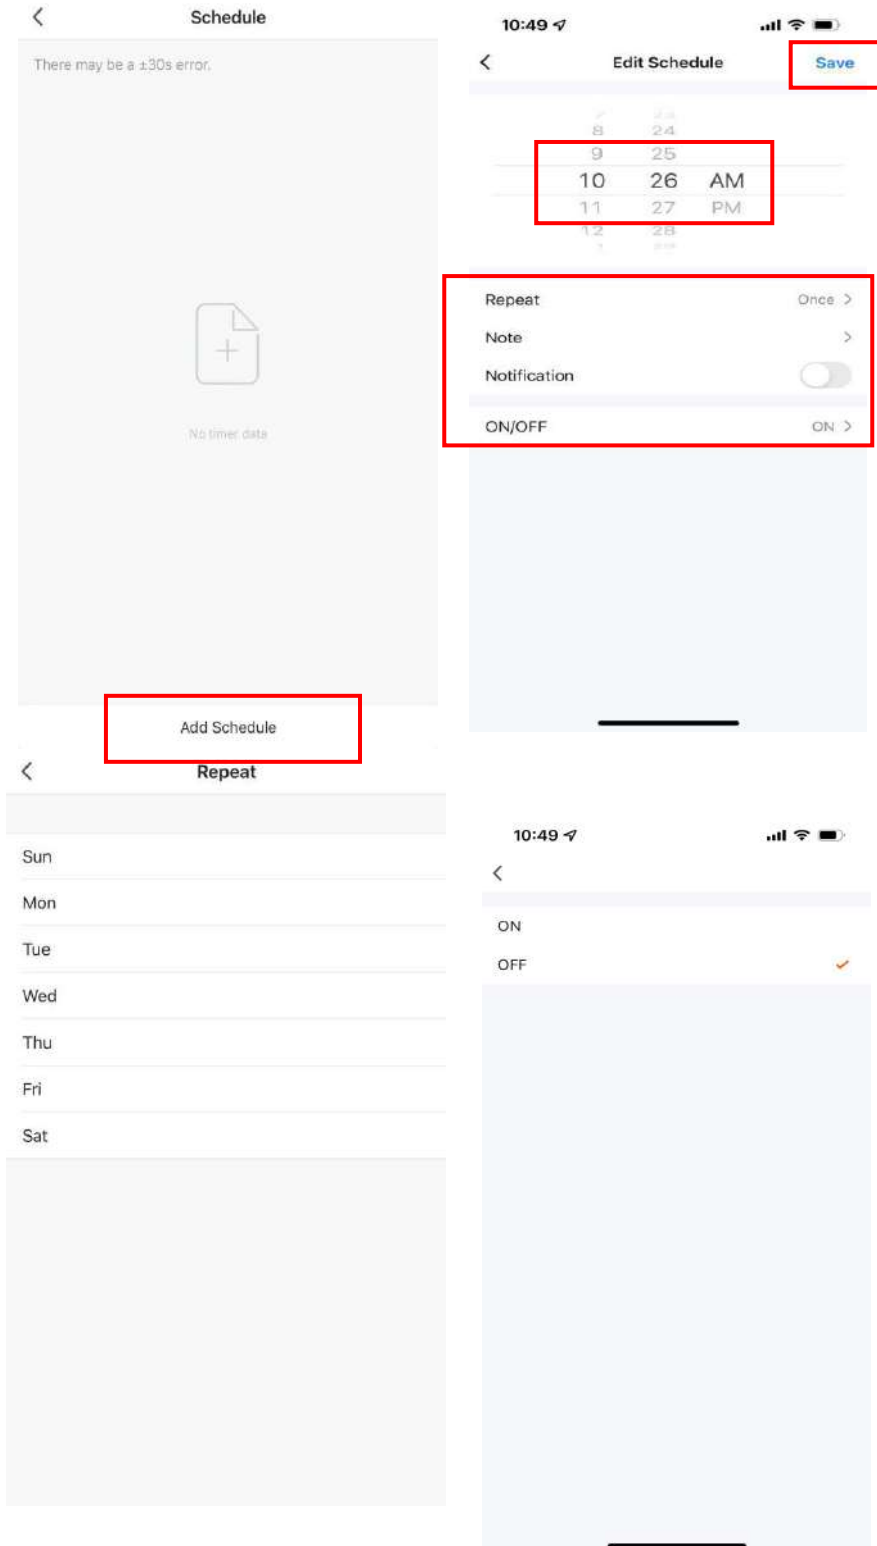
- **Mode setting**

Click  mode switch in the main interface of the device operation, the mode selection interface will pop up as shown below, click the mode you want to select;

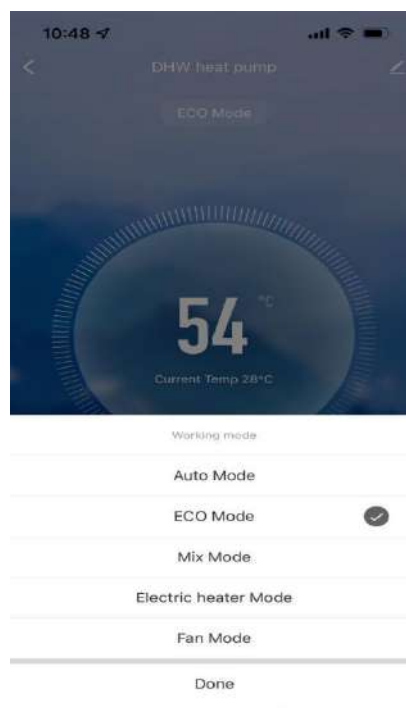

- **Timing settings**



Click “ Settings” in the main interface of the device operation to enter the timing setting interface, as shown below, click Add Timing; Enter the timing setting, slide the hour/minute up and down to set the timing time, and set the repeating date and on/off, press the upper right corner to save, as shown in the below pictures;




- **Remove Device**

✓ Remove device by APP



Click “” in the upper right corner of the device operation interface to enter the device details interface. Click “Remove device”, device will be removed and it enters into intelligent network connection mode. The “” icon will blink for 3 minutes, and the network can be reconfigured within 3 minutes. After 3 minutes, the intelligent network connection mode will exit.

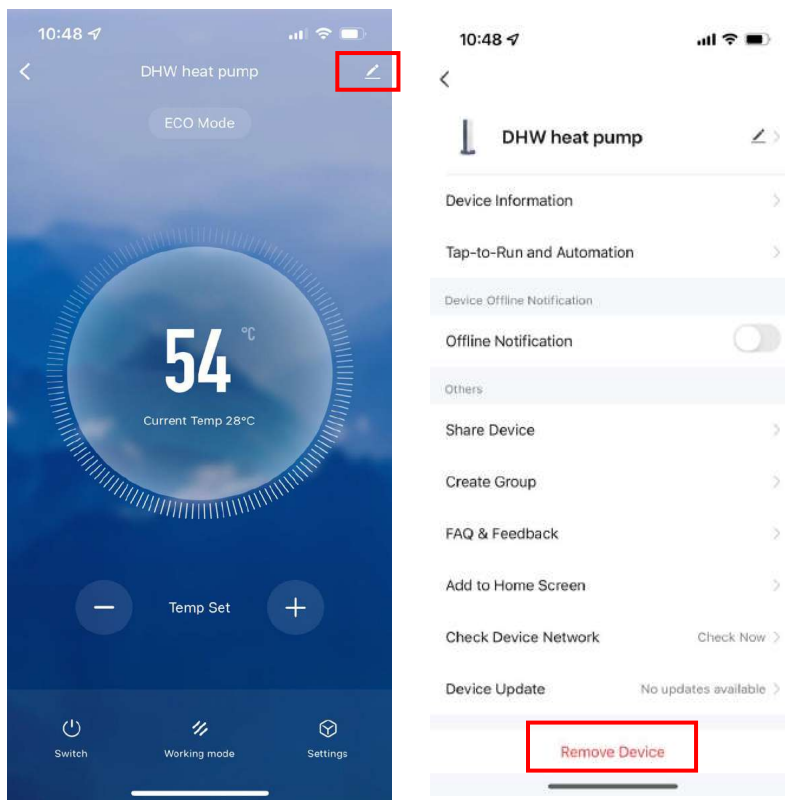

- **The description of Wifi module as below:**

The maximum transmission frequency: 2472 MHz

The maximum transmission power: +20dBm output power in 802.11b mode

AMG S.p.A.
Via delle Arti e dei Mestieri 1/3
36030 S. Vito di Leguzzano (VI)
Tel +39 0445 519933 - Fax +39 0445 519034
email: info@amg-spa.com
P.I. e C.F. 02488430246