


Sahara Noir

PORCELÁNICO ESMALTADO / GLAZED PORCELAIN TILE



OTROS FORMATOS /
OTHER SIZES

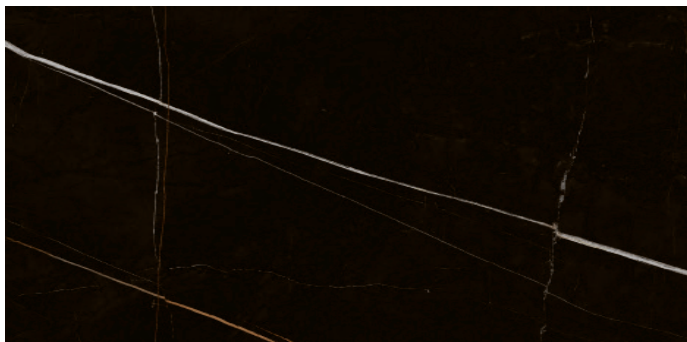

120x120 R
47''x47'' R

60x120 R
24''x47'' R

FORMATO / SIZE	ACABADO/FINISH	GRUPO / GROUP	TIPO/ TYPE
60x120 R / 24''x47''	Pulido / Polished	Bla	Mármol / Marble
	 PULIDO / POLISHED  PORCELÁNICO / PORCELAIN  MÁRMOL / MARBLE	 ANTIHIELO / ANTIFREEZE  RECTIFICADO / RECTIFIED	 V2 VARIACIÓN / VARIATION

DESCRIPCIÓN DEL TEST / TEST DESCRIPTION	VALOR DEL TEST / TEST VALUE	KTLCERAMICA	NORMA / STANDARD	
Absorción de agua / Water absorption	Ev ≤ 0,5%	Cumple / Complies	UNE-EN ISO 10545-3	
Fuerza de rotura / Breaking Strength	≥ 1300 N	Cumple / Complies	UNE-EN ISO 10545-4	
Resistencia a la flexión / Modulus of rupture	≥ 35 N/mm ²	Cumple / Complies	UNE-EN ISO 10545-4	
Abrasion superficial / Surface Abrasion	(PEI) Clase 1 / Class 1	Valor declarado / Declared value	UNE-EN-ISO 10545-7	
Resistencia al cuarteo / Crazeing resistance	Requerido / Requested	Cumple / Complies	UNE-EN ISO 10545-11	
Resistencia a la helada / Frost resistance	Requerido / Requested	Cumple / Complies	UNE-EN ISO 10545-12	
Resistencia química / Chemical resistance	Productos domésticos y de piscina / Household chemicals and swimming pool salts	Mínimo clase B / Minimum class B	Cumple / Complies	UNE-EN ISO 10545-13
	Ácidos a baja concentración / Low concentration of acids	Mínimo clase LB / Minimum class LB	Valor declarado / Declared value	UNE-EN ISO 10545-13
	Bases a baja concentración / Low concentration of alkalis	Mínimo clase LB / Minimum class LB	Valor declarado / Declared value	UNE-EN ISO 10545-13
Resistencia a las manchas / Stain resistance	Mínimo clase 3 / Minimum Class 3	Cumple / Complies	UNE-EN ISO 10545-14	

01/06/2022